

A RANGE ENGINEERED FOR UNWAVERING PROTECTION,
BUILT FOR COMPLETE PEACE OF MIND.






World Class Safety Standards

Tripper products conform to relevant global standards viz., IEC, EN and IS. They also have CE/ISI marking and DEKRA certification.



Safety Redefined

Finger proof terminals eliminate chances of accidental contact with live parts. You can install, operate and maintain tripper with total confidence.



Energy Limiting Class - 3

If fault occurs, the rapid arc quenching mechanism operates and extinguishes the arc quickly, ensuring lowest possible energy flow through the circuit. This minimizes risk of fire and maximizes life of your equipment.



Safety Meets Superior Aesthetics

Ergonomically designed, profiled for superior cooling and manufactured with fire retardant material. Tripper offers user safety combined with elegance.



True Contact Indication

Tripper range enhances safety through true contact indication even from a distance regardless of it's knob position. Red and Green indication flag positively identifies the electrical ON/OFF status.



Innovatively Profiled Breathing Channels

When two or more poles are placed adjacent to each other, the breathing channels are so profiled that the air circulates around individual pole, resulting in cooler operation, year after year.




Large Terminal Size & Biconnect

Tripper can easily accommodate cables of up to 35 sq.mm. Biconnect terminals offer convenience of connecting both cable and bus bar.




Two Position DIN Rail Clip

Installation on a DIN rail is further simplified with a two position DIN rail clip as a standard feature. Tripper range makes mounting on a standard DIN rail more convenient.



Non-Welding Contacts

Silver Graphite contact tips ensure higher life and maximum safety against contact welding due to it's superior anti-welding properties, enhancing safety and life of the system.



Combihead Screw

Tripper range of products provided with combihead screws allow you to use standard as well as Phillips screwdrivers, offering flexibility.



HIGHLIGHTS

- marked, marked
- Conforms to IS/IEC 60898 - 6 kA
- Higher life with use of heavy duty contacts
- Innovatively designed breathing channels between poles ensure cooler operation
- Energy saving - watt loss approximately 50% lower than those prescribed by IEC standard
- Manufactured with high quality fire retardant material
- True contact indication for enhanced safety

MINIATURE CIRCUIT BREAKERS (MCBs) - B CURVE



Single Pole

Description	MW*	Cat No	MRP/Unit in ₹	Std. Pkg. (Nos.)
6A B Curve	1	BA10060B	246	1/12
10A B Curve	1	BA10100B	246	1/12
16A B Curve	1	BA10160B	246	1/12
20A B Curve	1	BA10200B	246	1/12
25A B Curve	1	BA10250B	246	1/12
32A B Curve	1	BA10320B	246	1/12
40A B Curve	1	BA10400B	583	1/12



MINIATURE CIRCUIT BREAKERS (MCBs) - C CURVE

Single Pole

Double Pole

Three Pole

Four Pole

Description	Single Pole				Double Pole				Three Pole				Four Pole			
	MW*	Cat No	MRP/Unit in ₹	Std. Pkg. (Nos.)	MW*	Cat No	MRP/Unit in ₹	Std. Pkg. (Nos.)	MW*	Cat No	MRP/Unit in ₹	Std. Pkg. (Nos.)	MW*	Cat No	MRP/Unit in ₹	Std. Pkg. (Nos.)
6A C Curve	1	BA10060C	246	1/12	2	BA20060C	955	1/6	3	BA30060C	1570	1/4	4	BA40060C	2125	1/3
10A C Curve	1	BA10100C	246	1/12	2	BA20100C	955	1/6	3	BA30100C	1570	1/4	4	BA40100C	2125	1/3
16A C Curve	1	BA10160C	246	1/12	2	BA20160C	955	1/6	3	BA30160C	1570	1/4	4	BA40160C	2125	1/3
20A C Curve	1	BA10200C	246	1/12	2	BA20200C	955	1/6	3	BA30200C	1570	1/4	4	BA40200C	2125	1/3
25A C Curve	1	BA10250C	246	1/12	2	BA20250C	955	1/6	3	BA30250C	1570	1/4	4	BA40250C	2125	1/3
32A C Curve	1	BA10320C	246	1/12	2	BA20320C	955	1/6	3	BA30320C	1570	1/4	4	BA40320C	2125	1/3
40A C Curve	1	BA10400C	583	1/12	2	BA20400C	1430	1/6	3	BA30400C	2240	1/4	4	BA40400C	2755	1/3
63A C Curve	1	BA10630C	649	1/12	2	BA20630C	1590	1/6	3	BA30630C	2405	1/4	4	BA40630C	2930	1/3



*Module Width: 1 Mod = 17.5 mm

HIGHLIGHTS

- marked, marked
- Conforms to IS 12640 - 1, IEC 61008-1
- Available in DP & FP versions from 25A to 63A ratings with 30mA, 100mA & 300mA sensitivity
- Operates on Core Balance Current Transformer (CBCT) principle
- Finger proof IP20 terminals



RESIDUAL CURRENT CIRCUIT BREAKERS (RCCBs/ELCBs)

Description	Double Pole				Four Pole			
	MW*	Cat No	MRP/Unit in ₹	Std. Pkg. (Nos.)	MW*	Cat No	MRP/Unit in ₹	Std. Pkg. (Nos.)
25A 30mA	2	BC202503	2995	1	4	BC402503	4100	1
25A 100mA	2	BC202510	3275	1	4	BC402510	4175	1
25A 300mA	2	BC202530	3275	1	4	BC402530	4175	1
New 32 A 30mA	2	BC203203	3395	1	4	BC403203	4165	1
New 32A 100mA	2	BC203210	3440	1	4	BC403210	4250	1
New 32A 300mA	2	BC203230	3440	1	4	BC403230	4250	1
40A 30mA	2	BC204003	3395	1	4	BC404003	4090	1
40A 100mA	2	BC204010	3440	1	4	BC404010	4250	1
40A 300mA	2	BC204030	3440	1	4	BC404030	4250	1
63A 30mA	2	BC206303	4340	1	4	BC406303	4595	1
63A 100mA	2	BC206310	4525	1	4	BC406310	4745	1
63A 300mA	2	BC206330	4525	1	4	BC406330	4745	1
New 100A 30mA	2	BC210003	7495	1	4	BC410003	8135	1
New 100A 100mA	2	BC210010	7590	1	4	BC410010	8430	1
New 100A 300mA	2	BC210030	7590	1	4	BC410030	8430	1



HIGHLIGHTS

- marked
- Conforms to IEC 60947 - 3
- Higher life with use of heavy duty contacts
- Innovatively designed breathing channels between poles ensure cooler operation
- Manufactured with high quality fire retardant material
- True contact indication for enhanced safety



ISOLATORS

Description	Double Pole				Three Pole				Four Pole			
	MW*	Cat No	MRP/Unit in ₹	Std. Pkg. (Nos.)	MW*	Cat No	MRP/Unit in ₹	Std. Pkg. (Nos.)	MW*	Cat No	MRP/Unit in ₹	Std. Pkg. (Nos.)
40A Isolator	2	BE204000	610	1/6	3	BE304000	1075	1/4	4	BE404000	1385	1/3
63A Isolator	2	BE206300	760	1/6	3	BE306300	1230	1/4	4	BE406300	1440	1/3
100A Isolator	2	BE210000	1055	1/6	3	BE310000	1455	1/4	4	BE410000	1735	1/3

*Module Width: 1 Mod = 17.5 mm

HIGHLIGHTS

- CE marked
- Conforms to IEC 60947-6, IEC 60947-3
- Wide Range of Current Ratings
 - Generator Side - 1.5A to 30A
 - Electricity Board Side - 30A
- No. of Poles 1P+N, for single phase applications
- Protection Degree - IP20
- Reliable microcontroller based design for sensing & control
- Lower power consumption
- RoHS compliant



AUTOMATIC CHANGEOVER WITH CURRENT LIMITER(ACCL)

	Description EB/DG	MW*	Cat No	MRP/Unit in ₹	Std. Pkg. (Nos.)
New	30A/1A	4	BCL01030001	2360	1
	30A/1.5A	4	BCL010301E5	2360	1
New	30A/2A	4	BCL01030002	2360	1
	30A/2.5A	4	BCL010302E5	2360	1
	30A/3A	4	BCL01030003	2360	1
	30A/4A	4	BCL01030004	2360	1
	30A/5A	4	BCL01030005	2360	1
	30A/6A	4	BCL01030006	2360	1
	30A/8A	4	BCL01030008	2360	1
	30A/10A	4	BCL01030010	2360	1
	30A/12A	4	BCL01030012	2360	1
	30A/15A	4	BCL01030015	2360	1
	30A/20A	4	BCL01030020	2360	1
	30A/30A*	4	BCL01030030	2360	1

*Non current limiting variant

HIGHLIGHTS

- Settable overload current limit at DG side
- Separate power consumption monitoring for Mains & Genset
- Settable overvoltage & undervoltage protection
- Settable TPN or SPN mode at DG side
- Protection against single phasing

For 3 Phase ACCL programming video please scan the QR code or click here



THREE PHASE AUTOMATIC CHANGEOVER WITH CURRENT LIMITER (3PH ACCL) **NEW**



Description (AC-1) EB/DG	Cat No	MRP/Unit in ₹	Std. Pkg. (Nos.)
32A / 32A	AUCL03032032	18415	1
40A / 32A	AUCL03040032	18975	1
40A / 40A	AUCL03040040	20540	1
50A / 50A	AUCL03050050	29275	1
63A / 50A	AUCL03063050	32300	1
63A / 63A	AUCL03063063	36590	1
80A / 80A	AUCL03080080	55765	1
125A / 125A	AUCL03125125	93870	1

HIGHLIGHTS

- Conforms to IEC 60947-3
- Available with 3 positions (I-O-II) with centre off position
- Utilization category AC-22A



MODULAR CHANGEOVER SWITCHES


Double Pole					Four Pole				
Description	MW*	Cat No	MRP/Unit in ₹	Std. Pkg. (Nos.)	Description	MW*	Cat No	MRP/Unit in ₹	Std. Pkg. (Nos.)
25A	2	AUC00202500	2270	1	40A	4	AUC00404000	5985	1
40A	2	AUC00204000	3475	1	63A	6	AUC00406300	6785	1
63A	3	AUC00206300	4040	1					

*Module Width: 1 Mod = 17.5 mm



HIGHLIGHTS

- marked, marked
- Conforms to IS 12640-2, IEC 61009-1, EN 61009-1
- Short Circuit Breaking Capacity - 10kA
- Wide range of current ratings - 6A to 100A
- Suitable for Isolation
- Safety Shutter
- Line-load Reversibility
- True Position Indication
- Trip-free Mechanism
- Easy fault identification -
 1. Short Circuit fault Indication :
Clear indication by amber coloured flag
 2. Earth Leakage Fault Indication :
Clear indication by yellow coloured flag

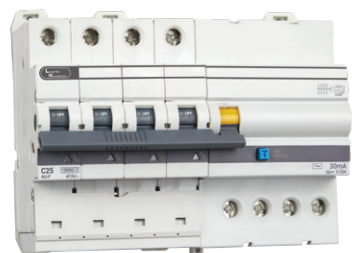

RESIDUAL CURRENT CIRCUIT BREAKER WITH OVER CURRENT PROTECTION (RCBOs)

NEW

Double Pole

Description	100 mA				30 mA			
	MW*	Cat No (30 mA)	MRP/Unit in ₹	Std. Pkg. (Nos.)	MW*	Cat No (100 mA)	MRP/Unit in ₹	Std. Pkg. (Nos.)
6A 2P RCBO	2	AUF3C200603	6710	1	2	AUF3C200610	6850	1
10A 2P RCBO	2	AUF3C201003	6710	1	2	AUF3C201010	6850	1
16A 2P RCBO	2	AUF3C201603	6710	1	2	AUF3C201610	6850	1
20A 2P RCBO	2	AUF3C202003	6710	1	2	AUF3C202010	6850	1
25A 2P RCBO	2	AUF3C202503	6710	1	2	AUF3C202510	6850	1
32A 2P RCBO	2	AUF3C203203	6710	1	2	AUF3C203210	6850	1
40A 2P RCBO	2	AUF3C204003	6710	1	2	AUF3C204010	6850	1
63A 2P RCBO	4	AUF3C206303	7970	1	4	AUF3C206310	8455	1

RESIDUAL CURRENT CIRCUIT BREAKER WITH OVER CURRENT PROTECTION (RCBOs)

NEW

Four Pole

Description	100 mA				30 mA			
	MW*	Cat No (30 mA)	MRP/Unit in ₹	Std. Pkg. (Nos.)	MW*	Cat No (100 mA)	MRP/Unit in ₹	Std. Pkg. (Nos.)
C16A 4P RCBO	7.5	AUF3C401603	7205	1	7.5	AUF3C401610	8020	1
C20A 4P RCBO	7.5	AUF3C402003	7205	1	7.5	AUF3C402010	8020	1
C25A 4P RCBO	7.5	AUF3C402503	7205	1	7.5	AUF3C402510	8020	1
C32A 4P RCBO	7.5	AUF3C403203	7440	1	7.5	AUF3C403210	8025	1
C40A 4P RCBO	7.5	AUF3C404003	7555	1	7.5	AUF3C404010	8025	1
C63A 4P RCBO	7.5	AUF3C406303	9055	1	7.5	AUF3C406310	9225	1
C80A 4P RCBO	12	AUF3C408003	35090	1	12	AUF3C408010	35875	1
C100A 4P RCBO	12	AUF3C410003	37515	1	12	AUF3C410010	38410	1



*Module Width: 1 Mod = 17.5 mm

Tripbox NXT



Electrical & Automation



Designed for safety.
Styled for you.

INDERSONS, S-11 Rajouri Garden, New Delhi 110027 email: sales@indersonsindia.com



Over-The-Frame Design
Delivers Higher Protection

Curved Door
Adds a Stylish Touch

Uniform Gasketing
Ensures Press Protection

DESIGNED FOR SAFETY

STYLED FOR YOU

SPN DISTRIBUTION BOARDS

- Available in 4, 6, 8, 12 & 16 way
- Ready to use DBs, complete with colour - coded wire set, 100A insulated bus bar, Neutral bar/s with shroud/s, Earth bar/s, Cement Spill Protector, Cable ties, Blanking plates and Circuit identification label
- Choice of metal and glazed door
- With provision for DP MCB/Isolator/RCCB/RCBO as incomer and SP MCBs as outgoing



SPN DISTRIBUTION BOARDS **NEW**

Description	Modules		Double Door	MRP/Unit in ₹	Double Door - Glazed	MRP/Unit in ₹
	Incomer	Outgoing				
4-Way	2	2	DTSPN004DD	1960	DTSPN004GD	2580
6-Way	2	4	DTSPN006DD	2300	DTSPN006GD	2760
8-Way	2	6	DTSPN008DD	2445	DTSPN008GD	3015
12-Way	2	10	DTSPN012DD	2940	DTSPN012GD	3655
16-Way	2	14	DTSPN016DD	3680	DTSPN016GD	4520
18-Way	2	16	DTSPN018DD	3830	DTSPN018GD	4785

TPN DISTRIBUTION BOARDS

- Available in 4, 6, 8 & 12 way
- Ready to use DBs, complete with colour - coded wire set, 100A insulated bus bars, Neutral bar/s with shroud/s, Earth bar/s, Cement Spill Protector, Cable ties, Blanking plates and Circuit identification label
- Choice of metal and glazed door
- With provision for FP MCB/Isolator/RCCB/RCBO as incomer and SP MCBs as outgoing



TPN DISTRIBUTION BOARDS **NEW**

Description	Modules		Double Door	MRP/Unit in ₹	Double Door - Glazed	MRP/Unit in ₹
	Incomer	Outgoing				
4-Way	8	4+4+4	DTPN004DD	4855	DTPN004GD	6335
6-Way	8	6+6+6	DTPN006DD	6055	DTPN006GD	7860
8-Way	8	8+8+8	DTPN008DD	7240	DTPN008GD	9400
12-Way	8	12+12+12	DTPN012DD	10770	DTPN012GD	14390

HORIZONTAL PPI (PER PHASE ISOLATION) DBs

- Available in 4, 6, 8 & 12 way
- Ready to use DBs, complete with colour - coded wire set, 100A insulated bus bars, Neutral bar/s with shroud/s, Earth bar/s, Cement Spill Protector, Cable ties, Blanking plates and Circuit identification label
- With provision for FP MCB/Isolator/RCCB/RCBO as incomer, DP RCCB/RCBO as sub-incomer and SP MCBs as outgoing



HORIZONTAL PPI (PER PHASE ISOLATION) DBs **NEW**

Description	Modules			Double Door	MRP/Unit in ₹
	Incomer	Sub-Incomer	Outgoing		
4-Way	8	2+2+2	4+4+4	DTHPI004DD	8025
6-Way	8	2+2+2	6+6+6	DTHPI006DD	9620
8-Way	8	2+2+2	8+8+8	DTHPI008DD	11470
12-Way	8	2+2+2	12+12+12	DTHPI012DD	15630

Flexi/ROW DBs

- Available in 2 Row 28 Mod, 3 Row 42 Mod, 3 Row 56 Mod, 4 Row 64 Mod
- Ready to use DBs, complete with colour - coded wire set, 100A insulated bus bars, Neutral bar/s with shroud/s, Earth bar/s, Cement Spill Protector, Cable ties, Blanking plates and Circuit identification label
- Gives flexibility to customer to mount modular devices as per requirement



FLEXI/ROW DBs

NEW

Description	Modules	IP 43	MRP/Unit in ₹
		Metal Door	
2 Row 28 Module	14	DTROW228DD	6450
3 Row 42 Module	14	DTROW342DD	7735
4 Row 56 Module	14	DTROW456DD	8410
4 Row 64 Module	16	DTROW464DD	9785

PHASE SEGREGATED DBs

- Available in 4, 6, 8 & 12 way
- Ready to use DBs, complete with colour - coded wire set, 100A insulated bus bars, Neutral bar/s with shroud/s, Earth bar/s, Cement Spill Protector, Cable ties, Blanking plates and Circuit identification label
- With provision for FP MCB/Isolator as incomer, DP RCCB/RCBO as sub-incomer and SP MCBs as outgoing



PHASE SEGREGATED DBs

NEW

Description	Modules			Double Door	MRP/Unit in ₹
	Incomer	Sub-Incomer	Outgoing		
4-Way	8	4+4+4	4+4+4	DTPSG004DD	12645
6-Way	8	4+4+4	6+6+6	DTPSG006DD	14275
8-Way	8	4+4+4	8+8+8	DTPSG008DD	15940
12-Way	8	4+4+4	12+12+12	DTPSG012DD	20115

PHASE SELECTOR DBs

- Available in 4, 6, 8 & 12 way
- Provided with 63A Selector Switches
- Ready to use DBs, complete with colour - coded wire set, 100A insulated bus bars, Neutral bar/s with shroud/s, Earth bar/s, Cable ties, Blanking plates and Circuit identification label
- With provision for FP MCB/Isolator/RCCB/RCBO as incomer and SP MCBs as outgoing



PHASE SELECTOR DBs

NEW

Description	Modules		Double Door	MRP/Unit in ₹
	Incomer	Outgoing		
4-Way	8	4+4+4	DTPSR004DD	15070
6-Way	8	6+6+6	DTPSR006DD	15435
8-Way	8	8+8+8	DTPSR008DD	16365
12-Way	8	12+12+12	DTPSR012DD	18360

VTPN DBs WITH MODULAR INCOMER

- Available in 4, 6, 8 & 12 way
- Ready to use DBs, complete with colour - coded wire set, Insulated vertical phase bus bars, Neutral bar/s with shroud/s, Earth bar/s, Cement Spill Protector, Cable ties, Blanking plates and Circuit identification label
- With provision for FP MCB/Isolator/RCCB/RCBO as incomer and SP/TP MCBs as outgoing



VTPN DBs WITH MODULAR INCOMER

NEW

Description	Modules		Double Door	MRP/Unit in ₹
	Incomer	Outgoing		
4-Way	8	4+4+4	DTVMT004DD	11625
6-Way	8	6+6+6	DTVMT006DD	13365
8-Way	8	8+8+8	DTVMT008DD	15510
12-Way	8	12+12+12	DTVMT012DD	20520

VTPN DBs WITH MCCB INCOMER

- Available in 4, 6, 8 & 12 way
- Ready to use DBs, complete with colour - coded wire set, Insulated vertical phase bus bars, Neutral bar/s with shroud/s, Earth bar/s, Cement Spill Protector, Cable ties, Blanking plates and Circuit identification label
- With provision for MCCB as incomer and SP/TP MCBs as outgoing
- Suitable for 3P/4P MCCB as incomer upto 125A - DY125U



VTPN DBs WITH MCCB INCOMER **NEW**

Description	Modules		Double Door	MRP/Unit in ₹
	Incomer	Outgoing		
4-Way	MCCB	4+4+4	DTVTL004DD	13875
6-Way	MCCB	6+6+6	DTVTL006DD	16240
8-Way	MCCB	8+8+8	DTVTL008DD	17635
12-Way	MCCB	12+12+12	DTVTL012DD	22805

DBS WITH PROVISION FOR TV / TELEPHONE SPLITTERS

- Distribution Boards equipped with provisions to mount TV / Telephone splitters
- Available in SPN & TPN DBs
- Communication DB equipped with provisions to mount 2 ONT, Spike guard, Data switch, TV / Telephone splitters



DBS WITH PROVISION FOR TV / TELEPHONE SPLITTERS **NEW**

DB Type	Description	Modules		IP 43 Metal Door	MRP/Unit in ₹
		Incomer	Outgoing		
SPN	6 way	2	4	DTSPN006DDTV	4490
	8 way	2	6	DTSPN008DDTV	4825
	12 way	2	10	DTSPN012DDTV	5940
	16 way	2	14	DTSPN016DDTV	6890
	18 way	2	16	DTSPN018DDTV	8155
TPN	4 way	8	4+4+4	DTTPN004DDTV	8825
	6 way	8	6+6+6	DTTPN006DDTV	10195
	8 way	8	8+8+8	DTTPN008DDTV	12155
Communication DB				DTCOM01DD	*

EV CHARGING DB

- Engineered specifically Charging application-3.3kW
- Robust earth leakage, short circuit and overload protection with RCBO
- Factory fitted RCBO, switch and socket



EV CHARGING DB **NEW**

Description	Modules	IP 43 Metal Door	MRP/Unit in ₹
2 way EVDB	2	DTEVC002LD	*
4 way EVDB	4	DTEVC004LD	*

*For details, please contact nearest branch office

ENCLOSURES

- Available in 2, 3, 4 & 6 way
- With provision to mount MCB/Isolator/RCCB/RCBO or other modular devices



Single Door

ENCLOSURES

NEW

Description	Modules	Single Door	MRP/Unit in ₹
2-Way	2	DTENC002SD	575
3-Way	3	DTENC003SD	645
4-Way	4	DTENC004SD	645
6-Way	6	DTENC006SD	970

PLUG & SOCKET DBs

- SPN 10A & 20A; TPN - 32A
- With provision to mount MCBs/RCCBs



Single Door

PLUG & SOCKET DBs

NEW

Description	No. of Pins	Modules	Single Door	MRP/Unit in ₹
10A, 2 Pin+SC^	P+N	1	DTMPS110SD	1460
20A, 2 Pin+SC^	P+N	1	DTMPS120SD	1560
20A, 2 Pin+SC^	P+N	2	DTMPS220SD	1700
32A, 3 Pin+SC^	3P	3	DTMPS332SD	4030

SC^ - Scrapping Earth

METAL PLUG & SOCKET

- Designed to ensure safe functioning of electrical equipment and the user safety
- Plugs & Sockets find its applications at air conditioners, welding machines, industrial equipment, etc., are made of non corrosive aluminum alloy
- Conforms to IS 8804



METAL PLUG & SOCKET


Description	No. of Pins	Cat No	MRP/Unit in ₹
Metal Plug			
10A, 2 Pin+SC^	P+N	MPS210P	320
20A, 2 Pin+SC^	P+N	MPS220P	340
20A, 3 Pin+SC^	3P	MPS320P	450
32A, 3 Pin+SC^	3P	MPS332P	855
Metal Socket			
10A, 2 Pin+SC^	P+N	MPS210S	335
20A, 2 Pin+SC^	P+N	MPS220S	370
20A, 3 Pin+SC^	3P	MPS320S	505
32A, 3 Pin+SC^	3P	MPS332S	855

SC^ - Scrapping Earth

Note: Standard Pack Quantity for Metal Plug & Socket - 20 Nos.

SINGLE PHASE NEUTRAL (SPN) DBs

Description	Modules		Single Door	MRP/Unit in ₹	Double Door	MRP/Unit in ₹
	Incomer	Outgoing				
4 way	2	2	BH104SDB	1095	BH104DDB	1750
6 way	2	4	BH106SDB	1200	BH106DDB	1965
8 way	2	6	BH108SDB	1355	BH108DDB	2145
12 way	2	10	BH112SDB	1805	BH112DDB	2615
16 way	2	14	BH116SDB	2250	BH116DDB	3220

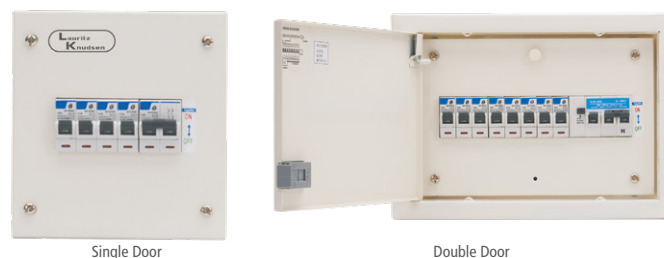

Single Door

Double Door

HIGHLIGHTS

- Ready to use DBs, complete with colour - coded wire set, 100A bus bar, Neutral bar/s & Earth bar/s
- Superior quality powder coating for better looks and longer life
- DB is suitable for surface or flush mounting



Double Door

THREE PHASE NEUTRAL (TPN) DBs

Description	Modules		Single Door	MRP/Unit in ₹	Double Door	MRP/Unit in ₹
	Incomer	Outgoing				
4 way	8	4+4+4	BH304SDB	3385	BH304DDB	4375
6 way	8	6+6+6	BH306SDB	4185	BH306DDB	5375
8 way	8	8+8+8	BH308SDB	4835	BH308DDB	6520
12 way	8	12+12+12	BH312SDB	6860	BH312DDB	9380



Double Door

PHASE SELECTOR DBs

Description	Modules		Double Door	MRP/Unit in ₹
	Incomer	Outgoing		
4 way	8	4+4+4	BHC04DDB	13775
6 way	8	6+6+6	BHC06DDB	14385

Provided with 40A selector switches