


## PERFECT CONTROL OF YOUR INSTALLATION


The DX<sup>3</sup> range  
has a selection  
of electrical  
auxiliaries  
**for monitoring  
and controlling  
circuits remotely**

Auxiliary contacts and  
fault signal contacts,  
shunt trips, undervoltage  
releases, motorised  
controls and automatic  
reclosers

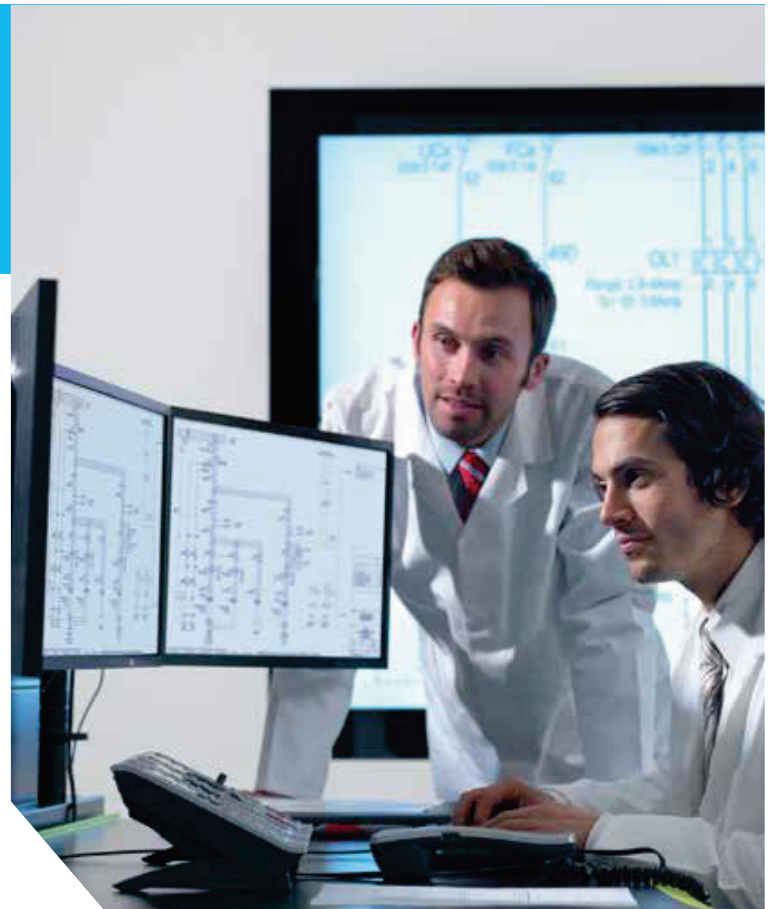


### POWER OVERVOLTAGE PROTECTION (POP)

Protects your system from serious  
damages caused by overvoltages

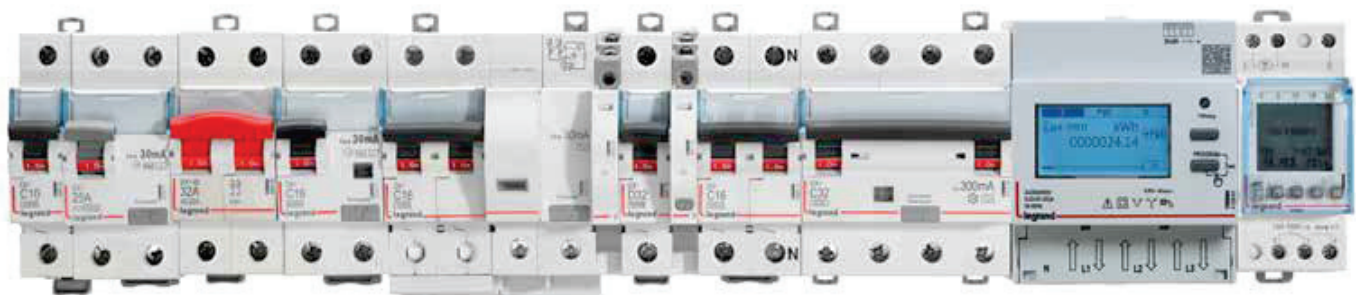

Scan to know more about  
the product.

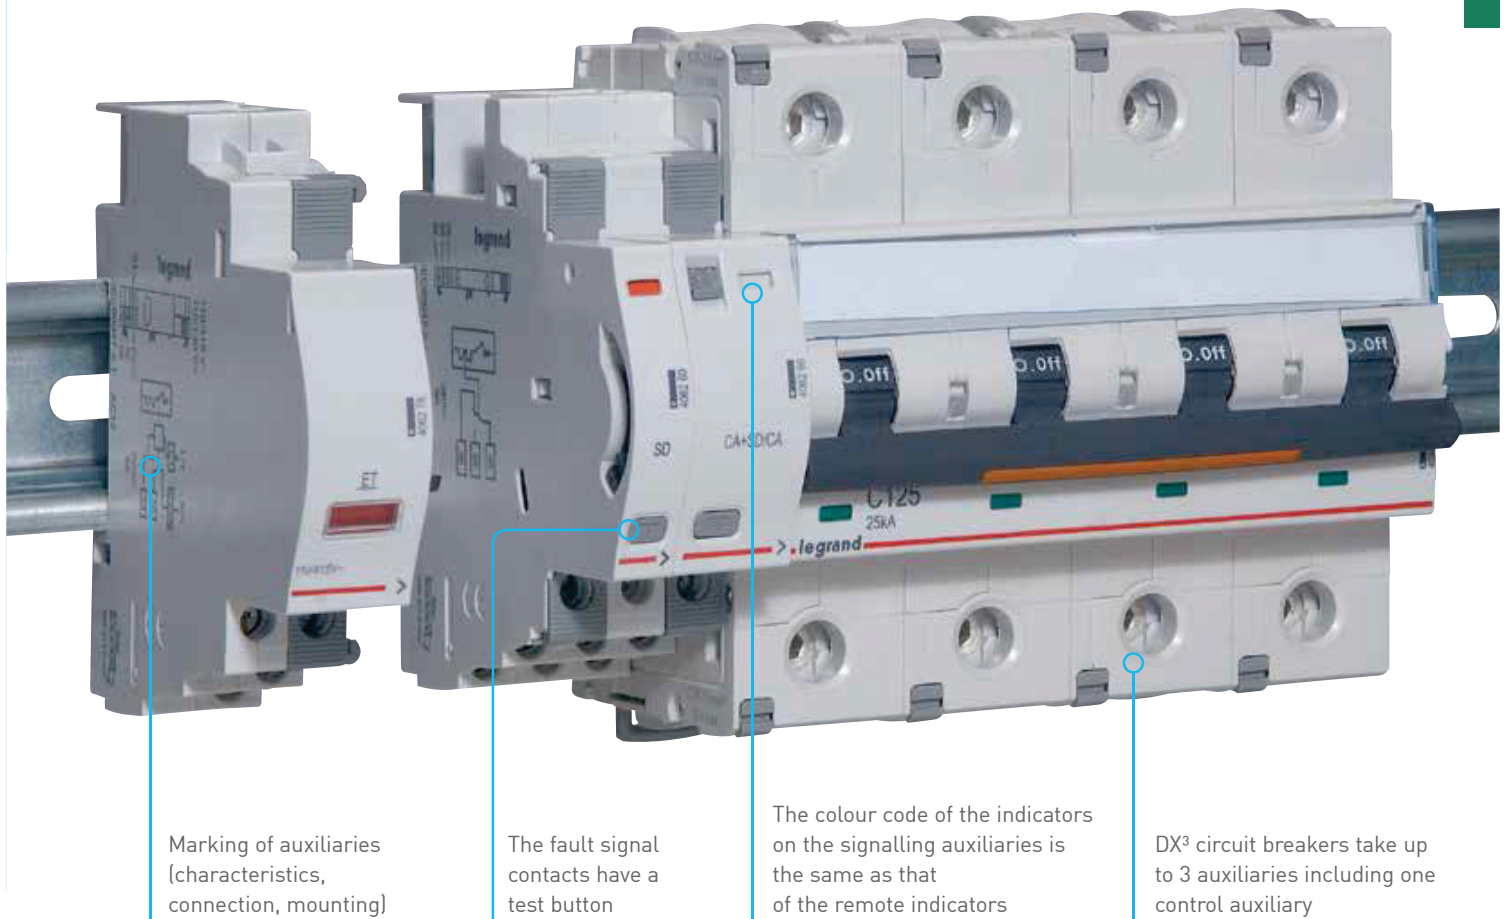

#### OPTIMISED SPACE IN THE DISTRIBUTION BOARD

Legrand motorised controls are the most compact on the market: 1 module wide. They save a great deal of space inside the distribution board.

DX<sup>3</sup> motorised controls can be used with 1 module per pole devices (circuit breakers, RCBs and RCCBs) just as easily as auxiliaries.

## DX<sup>3</sup> AC MCBs

Cat.Nos	Nominal Rating	Number of 17.5 mm modules	MRP* ₹ / Unit	Pack
---------	----------------	---------------------------	---------------	------

### MCBs for AC applications till 63A

10 kA ISI marked as per IS/IEC 60898-1 2002  
Integrated label holder  
Sliding bottom clamp  
Efficient air channels  
Color coded On/Off indication on dolly  
Biconnect lower terminals  
IP 20 protected terminals  
Sliding shutters  
Compatible with signal and control Auxiliaries

### DC-80 V per pole - 1 kA

#### C Curve

#### Single pole 240/410V

4085 80	0.5	1	640	1/10/120
4085 81	1	1	640	1/10/120
4085 83	2	1	634	1/10/120
4085 84	3	1	634	1/10/120
4085 85	4	1	634	1/10/120
4085 87	6	1	390	1/10/120
4085 90	10	1	390	1/10/120
4085 92	16	1	390	1/10/120
4085 93	20	1	390	1/10/120
4085 94	25	1	390	1/10/120
4085 95	32	1	390	1/10/120
4085 96	40	1	892	1/10/120
4085 97	50	1	892	1/10/120
4085 98	63	1	892	1/10/120



4085 90

#### Single pole + neutral 240V

4086 02	0.5	2	1674	1/5/60
4086 03	1	2	1674	1/5/60
4086 05	2	2	1674	1/5/60
4086 06	3	2	1674	1/5/60
4086 07	4	2	1674	1/5/60
4086 09	6	2	1184	1/5/60
4086 12	10	2	1184	1/5/60
4086 14	16	2	1184	1/5/60
4086 15	20	2	1184	1/5/60
4086 16	25	2	1184	1/5/60
4086 17	32	2	1184	1/5/60
4086 18	40	2	1916	1/5/60
4086 19	50	2	1916	1/5/60
4086 20	63	2	1916	1/5/60



4086 14

## DX<sup>3</sup> AC MCBs

Cat.Nos	Nominal Rating	Number of 17.5 mm modules	MRP* ₹ / Unit	Pack
---------	----------------	---------------------------	---------------	------

### Double pole 415V

4086 21	0.5	2	1738	1/40
4086 22	1	2	1738	1/40
4086 24	2	2	1738	1/40
4086 25	3	2	1738	1/40
4086 26	4	2	1738	1/40
4086 28	6	2	1280	1/40
4086 31	10	2	1280	1/40
4086 33	16	2	1280	1/40
4086 34	20	2	1280	1/40
4086 35	25	2	1280	1/40
4086 36	32	2	1280	1/40
4086 37	40	2	2014	1/40
4086 38	50	2	2014	1/40
4086 39	63	2	2014	1/40



4086 37

### Triple pole 415V

4086 43	0.5	3	2560	1/32
4086 44	1	3	2560	1/32
4086 46	2	3	2560	1/32
4086 47	3	3	2560	1/32
4086 48	4	3	2560	1/32
4086 50	6	3	2076	1/32
4086 53	10	3	2076	1/32
4086 55	16	3	2076	1/32
4086 56	20	3	2076	1/32
4086 57	25	3	2076	1/32
4086 58	32	3	2076	1/32
4086 59	40	3	3150	1/32
4086 60	50	3	3150	1/32
4086 61	63	3	3150	1/32



4086 55

### Triple pole + neutral 415V

4086 65	0.5	4	3248	1/32
4086 66	1	4	3248	1/32
4086 68	2	4	3248	1/32
4086 69	3	4	3248	1/32
4086 70	4	4	3248	1/32
4086 72	6	4	2706	1/32
4086 75	10	4	2706	1/32
4086 77	16	4	2706	1/32
4086 78	20	4	2706	1/32
4086 79	25	4	2706	1/32
4086 80	32	4	2706	1/32
4086 81	40	4	3870	1/32
4086 82	50	4	3870	1/32
4086 83	63	4	3870	1/32



4086 77

\* MRP - Maximum Retail Price Inclusive of all taxes including GST.

Bold Cat.Nos are products normally available with Legrand (India) Stockists.  
Cat.Nos that are not bold - delivery within 4 - 8 weeks from the date of order.  
Bold packing quantity is our mandatory packing. Orders to be placed by Legrand (India) Stockist in multiples of the same.

## DX<sup>3</sup> AC MCBs

Cat.Nos	Nominal Rating	Number of 17.5 mm modules	MRP* ₹ / Unit	Pack
---------	----------------	---------------------------	---------------	------

### Four pole 415V

4086 84	0.5	4	3206	1/32
4086 85	1	4	3206	1/32
4086 87	2	4	3206	1/32
4086 88	3	4	3206	1/32
4086 89	4	4	3206	1/32
4086 91	6	4	2820	1/32
4086 94	10	4	2820	1/32
4086 96	16	4	2820	1/32
4086 97	20	4	2820	1/32
4086 98	25	4	2820	1/32
4086 99	32	4	2820	1/32
4087 00	40	4	4012	1/32
4087 01	50	4	4012	1/32
4087 02	63	4	4012	1/32

## D Curve

### Single pole 240/415V

4087 06	0.5	1	644	1/10/120
4087 07	1	1	644	1/10/120
4087 09	2	1	644	1/10/120
4087 10	3	1	644	1/10/120
4087 11	4	1	640	1/10/120
4087 12	6	1	536	1/10/120
4087 14	10	1	536	1/10/120
4087 16	16	1	536	1/10/120
4087 17	20	1	536	1/10/120
4087 18	25	1	536	1/10/120
4087 19	32	1	536	1/10/120
4087 20	40	1	■	1/10/120
4087 21	50	1	■	1/10/120
4087 22	63	1	■	1/10/120

### Single pole + neutral 240V

4087 26	0.5	2	1674	1/5/60
4087 27	1	2	1674	1/5/60
4087 29	2	2	1674	1/5/60
4087 30	3	2	1674	1/5/60
4087 31	4	2	1674	1/5/60

### Double pole 415V

4087 32	0.5	2	1754	1/40
4087 33	1	2	1754	1/40
4087 35	2	2	1754	1/40
4087 36	3	2	1754	1/40
4087 37	4	2	1754	1/40
4087 38	6	2	1326	1/40
4087 40	10	2	1326	1/40
4087 42	16	2	1326	1/40
4087 43	20	2	1326	1/40
4087 44	25	2	1326	1/40
4087 45	32	2	1326	1/40
4087 46	40	2	■	1/40
4087 47	50	2	■	1/40
4087 48	63	2	■	1/40

\* MRP - Maximum Retail Price Inclusive of all taxes including GST.  
■ Price available on request.

## D Curve

Cat.Nos	Nominal Rating	Number of 17.5 mm modules	MRP* ₹ / Unit	Pack
---------	----------------	---------------------------	---------------	------

### Triple pole 415V

4087 52	0.5	3	2612	1/32
4087 53	1	3	2612	1/32
4087 55	2	3	2612	1/32
4087 56	3	3	2612	1/32
4087 57	4	3	2612	1/32
4087 58	6	3	2140	1/32
4087 60	10	3	2140	1/32
4087 62	16	3	2140	1/32
4087 63	20	3	2140	1/32
4087 64	25	3	2140	1/32
4087 65	32	3	2140	1/32
4087 66	40	3	■	1/32
4087 67	50	3	■	1/32
4087 68	63	3	■	1/32

### Triple pole + neutral 415V

4087 72	0.5	4	3184	1/32
4087 73	1	4	3184	1/32
4087 75	2	4	3184	1/32
4087 76	3	4	3184	1/32
4087 77	4	4	3184	1/32

### Four pole 415V

4087 78	0.5	4	3176	1/32
4087 79	1	4	3176	1/32
4087 81	2	4	3176	1/32
4087 82	3	4	3176	1/32
4087 83	4	4	3176	1/32
4087 84	6	4	2800	1/32
4087 86	10	4	2800	1/32
4087 88	16	4	2800	1/32
4087 89	20	4	2800	1/32
4087 90	25	4	2800	1/32
4087 91	32	4	2800	1/32
4087 92	40	4	■	1/32
4087 93	50	4	■	1/32
4087 94	63	4	■	1/32

### Circuit breakers AC applications 80 - 125A

10 kA as per IEC 60947-2  
Integrated label holder  
Sliding insulating shield  
Color coded contact indication window  
IP 20 protected terminals  
50 sq mm terminals

### \*Single pole 230V / 400V

4085 99	80	1.5	3458	1/5/160
4086 00	100	1.5	3784	1/5/161
4086 01	125	1.5	4106	1/5/162

Bold Cat.Nos are products normally available with Legrand (India) Stockists.  
Cat.Nos that are not bold - delivery within 4 - 8 weeks from the date of order.  
Bold packing quantity is our mandatory packing. Orders to be placed by Legrand (India) Stockist in multiples of the same.



## DX<sup>3</sup> MCB



4086 40



4086 63



4087 05

Cat.Nos	Nominal Rating	Number of 17.5 mm modules	MRP* ₹ / Unit	Pack
---------	----------------	---------------------------	---------------	------

### Double pole 230V / 400V\*

4086 40	80	3	7664	1/5/60
4086 41	100	3	8168	1/5/60
4086 42	125	3	8894	1/5/60

### Triple pole 400V\*

4086 62	80	4.5	12316	1/9
4086 63	100	4.5	13118	1/9
4086 64	125	4.5	14418	1/9

### Four pole 400V\*

4087 03	80	6	15882	1/9
4087 04	100	6	16548	1/9
4087 05	125	6	18538	1/9

## DX<sup>3</sup> DC MCBs

### Circuit breakers DC applications upto 63A

6 kA as per IEC 60947-2  
Integrated label holder  
Sliding bottom clamp  
Improved air channels  
Color coded On/Off indication on dolly  
Biconnect lower terminals  
IP 20 protected terminals  
Sliding shutters

### Single pole 250V

4087 98	0.5	1	952	1/10/120
4087 99	1	1	952	1/10/120
4088 01	2	1	952	1/10/120
4088 02	3	1	952	1/10/120
4088 03	4	1	952	1/10/120
4088 04	6	1	788	1/10/120
4088 06	10	1	788	1/10/120
4088 08	16	1	788	1/10/120
4088 09	20	1	788	1/10/120
4088 10	25	1	788	1/10/120
4088 11	32	1	796	1/10/120
4088 12	40	1	1052	1/10/120
4088 13	50	1	1052	1/10/120
4088 14	63	1	1052	1/10/120

### Double pole 250V

4088 15	0.5	1	1986	1/5/60
4088 16	1	1	1986	1/5/60
4088 18	2	1	1986	1/5/60
4088 19	3	1	1986	1/5/60
4088 20	4	1	1986	1/5/60
4088 21	6	1	1842	1/5/60
4088 23	10	1	1842	1/5/60
4088 25	16	1	1842	1/5/60
4088 26	20	1	1842	1/5/60
4088 27	25	1	1842	1/5/60
4088 28	32	1	1842	1/5/60
4088 29	40	1	2172	1/5/60
4088 30	50	1	2172	1/5/60
4088 31	63	1	2172	1/5/60



4088 12

## DX<sup>3</sup> MCB

Cat.Nos	Nominal Rating	Number of 17.5 mm modules	MRP* ₹ / Unit	Pack
---------	----------------	---------------------------	---------------	------

## DX<sup>3</sup> RDSO DC MCB

### Single pole

4088 32	0.5	1	976	1/10/120
4088 33	1	1	976	1/10/120
4088 34	1.5	1	976	1/10/120
4088 35	1.6	1	976	1/10/120
4088 36	2.5	1	976	1/10/120
4088 37	3	1	714	1/10/120
4088 38	4	1	714	1/10/120
4088 39	5	1	868	1/10/120
4088 40	10	1	868	1/10/120
4088 41	15	1	868	1/10/120
4088 42	20	1	868	1/10/120
4088 43	25	1	868	1/10/120
4088 44	30	1	990	1/10/120
4088 45	35	1	990	1/10/120
4088 46	40	1	1102	1/10/120
4088 47	50	1	1102	1/10/120
4088 48	60	1	1102	1/10/120

## DX<sup>3</sup> isolators

### Isolators for AC applications upto 125A

ISI marked as per IEC 60947-3  
Integrated label holder  
Ergonomic red color dolly  
Sliding bottom clamp  
Double break mechanism  
Improved air channels  
Color coded On/Off indication on dolly  
Biconnect lower terminals  
IP 20 protected terminals  
Compatible with signal and control Auxiliaries  
Sliding shutters

### Double pole 240V

4065 00	32	2	678	1/5/60
<b>4065 01</b>	40	2	746	1/5/60
<b>4065 02</b>	63	2	986	1/5/60
4065 04	100	2	1354	1/5/60
4065 05	125	2	1540	1/5/60

### Triple pole 415V

4065 09	32	3	1222	1/40
<b>4065 10</b>	40	3	1310	1/40
<b>4065 11</b>	63	3	1560	1/40
4065 13	100	3	1722	1/40
4065 14	125	3	1986	1/40

### Four pole 415V

4065 18	32	4	1340	1/32
4065 19	40	4	1664	1/32
4065 20	63	4	1836	1/32
4065 22	100	4	2218	1/32
4065 23	125	4	2444	1/32



4065 00



4065 10



4065 20

\* MRP - Maximum Retail Price Inclusive of all taxes including GST.  
♦ For further details on product contact nearest Legrand Sales Office.

Bold Cat.Nos are products normally available with Legrand (India) Stockists.  
Cat.Nos that are not bold - delivery within 4 - 8 weeks from the date of order.  
Bold packing quantity is our mandatory packing. Orders to be placed by Legrand (India) Stockist in multiples of the same.

## Isolators for AC applications upto 125A

Cat.Nos	Nominal Rating	Number of 17.5 mm modules	MRP* ₹ / Unit	Pack
---------	----------------	---------------------------	---------------	------

### DX<sup>3</sup> RCCBs

#### RCCBs for AC applications upto 63A

ISI marked as per IS 12640-1  
Integrated label holder  
Ergonomic Grey color dolly  
Sliding bottom clamp  
Compatible with signal and control Auxiliaries  
Color coded On/Off indication on dolly  
Biconnect lower terminals  
IP 20 protected terminals  
35 sq mm terminals  
Sliding shutters

#### Type - AC

Sensitive to residual alternating currents  
Use : standard applications

#### Double pole 240V

##### 30 mA

4118 51	25	2	4022	1/5/60
4118 52	40	2	4670	1/5/60
4118 53	63	2	5740	1/5/60

##### 100 mA

4118 56	25	2	4430	1/5/60
4118 57	40	2	5116	1/5/60
4118 58	63	2	6092	1/5/60

##### 300 mA

4118 61	25	2	4506	1/5/60
4118 62	40	2	5214	1/5/60
4118 63	63	2	6116	1/5/60

#### Four pole 415V

##### 30 mA

4118 76	25	4	5514	1/32
4118 77	40	4	5652	1/32
4118 78	63	4	6288	1/32

##### 100 mA

4118 81	25	4	5814	1/32
4118 82	40	4	5882	1/32
4118 83	63	4	6918	1/32

##### 300 mA

4118 86	25	4	5988	1/32
4118 87	40	4	6076	1/32
4118 88	63	4	6942	1/32

#### Type- S

Delayed trip for discrimination with other residual current devices.

Use : for discrimination with a downstream device

#### Double pole 415V, A-S

##### 300 mA

4118 66	25	2	7742	1/5/60
4118 67	40	2	8128	1/5/60
4118 68	63	2	8364	1/5/60

#### Four pole 415 V, A-S

##### 300 mA

4118 91	25	4	8718	1/5/60
4118 92	40	4	8830	1/5/60
4118 93	63	4	9226	1/5/60



4118 57



4118 77



4118 83



4118 93

## RCCBs for AC applications upto 63A

Cat.Nos	Nominal Rating	Number of 17.5 mm modules	MRP* ₹ / Unit	Pack
---------	----------------	---------------------------	---------------	------

### Type Hpi

Enhanced immunity to unwanted tripping in environments with disturbances, eg. diesels, computers, printers, etc.

• Detects faults with DC components eg. thyristors, trio etc.

#### Double pole 240V HPI

##### 30 mA

4118 71	25	2	8466	1/5/60
4118 72	40	2	8888	1/5/60
4118 73	63	2	9146	1/5/60

#### Four pole 415V HPI

##### 30 mA

4118 96	25	4	9590	1/32
4118 97	40	4	9892	1/32
4118 98	63	4	10148	1/32

### DX<sup>3</sup> RCBOs

#### RCBOs assembled for AC applications upto 63A

ISI marked as per IS 12640-2  
Integrated label holder  
Ergonomic design  
Color coded On/Off indication on dolly  
Compatible with signal and control Auxiliaries  
Front face indication for earth leakage fault  
IP 20 protected terminals  
35 sq mm terminals  
Sliding shutters

#### Type - AC

Sensitive to residual alternating currents  
Use : standard applications

#### Double pole 240V AC Type

##### 30 mA

4113 22	6	4	5010	1/32
4113 23	10	4	5010	1/32
4113 24	16	4	5066	1/32
4113 25	25	4	5066	1/32
4113 26	32	4	5288	1/32
4113 27	40	4	6072	1/32
4113 28	63	4	7398	1/32

##### 100 mA

4113 29	6	4	6242	1/32
4113 30	10	4	6242	1/32
4113 31	16	4	6036	1/32
4113 32	25	4	6036	1/32
4113 33	32	4	6036	1/32
4113 34	40	4	6892	1/32
4113 35	63	4	7954	1/32

##### 300 mA

4113 36	16	4	6272	1/32
4113 37	25	4	6272	1/32
4113 38	32	4	6272	1/32
4113 39	40	4	7072	1/32
4113 40	63	4	7968	1/32



4118 97



4113 24

\* MRP - Maximum Retail Price Inclusive of all taxes including GST.

Bold Cat.Nos are products normally available with Legrand (India) Stockists. Cat.Nos that are not bold - delivery within 4 - 8 weeks from the date of order. Bold packing quantity is our mandatory packing. Orders to be placed by Legrand (India) Stockist in multiples of the same.

## RCBOs assembled for AC applications upto 63A

Cat.Nos	Nominal Rating	Number of 17.5 mm modules	MRP* ₹ / Unit	Pack
---------	----------------	---------------------------	---------------	------

### Four pole 415V, AC type 30 mA

4113 65	16	7	6766	1/16
4113 66	25	7	6766	1/16
4113 67	32	7	6978	1/16
4113 68	40	7	7102	1/16
4113 69	63	7	8146	1/16

### Four pole 415V, AC type 100 mA

4113 70	16	7	7626	1/16
4113 71	25	7	7626	1/16
4113 72	32	7	7700	1/16
4113 73	40	7	7844	1/16
4113 74	63	7	8632	1/16

### Four pole 415V, AC type 300 mA

4113 75	16	7	7864	1/16
4113 76	25	7	7864	1/16
4113 77	32	7	8000	1/16
4113 78	40	7	8160	1/16
4113 79	63	7	8784	1/16



4113 79

## RCBOs compact for AC applications upto 32A, 6kA

### upto 32A, 6kA

Conforms to IEC 60947

Integrated label holder

Ergonomic design

Color coded On/Off indication on dolly

Front face indication for earth leakage fault

IP 20 protected terminals

35 sq mm terminals

Sliding shutters

### Type- AC

Sensitive to residual alternating currents

Use : standard applications

### Double pole 240V, AC type

#### 30 mA

4113 90	6	2	5956	1/32
4113 91	10	2	5956	1/32
4113 92	16	2	5956	1/32
4113 93	20	2	5956	1/32
4113 94	25	2	5956	1/32
4113 95	32	2	6250	1/32



4113 94

#### 300 mA

4113 97	6	2	6244	1/32
4113 98	10	2	6244	1/32
4113 99	16	2	6244	1/32
4114 00	20	2	6244	1/32
4114 01	25	2	6244	1/32
4114 02	32	2	6554	1/32

\* MRP - Maximum Retail Price Inclusive of all taxes including GST.

## RCBOs compact for AC applications

Cat.Nos	Description	Number of 17.5 mm modules	MRP* ₹ / Unit	Pack
---------	-------------	---------------------------	---------------	------

### Four pole 415V, AC type 30 mA

4114 18	10	4	8138	1/16
4114 19	16	4	8138	1/16
4114 20	20	4	8138	1/16
4114 21	25	4	8138	1/16

### Four pole 415V, AC type 300 mA

4114 23	10	4	9350	1/16
4114 24	16	4	9350	1/16
4114 25	20	4	9350	1/16
4114 26	25	4	9350	1/16

### Type Hpi

Enhanced immunity to unwanted tripping in environments with disturbances. eg. diesels, computers, printers, etc.

• Detects faults with DC components eg. thyristors, trio etc.

### Double pole 240V, HPI type

#### 30 mA

4114 15	25	2	11352	1/32
4114 16	32	2	12002	1/32

### Type A

Sensitive to residual alternating currents and residual currents with a DC component.

Use : special applications

- if it is possible that the fault currents are not purely sinusoidal (rectifier bridge, etc.)

### Four pole 415V, A type

#### 30 mA

4114 28	10	4	9178	1/16
4114 29	16	4	9178	1/16
4114 30	20	4	9178	1/16
4114 31	25	4	9178	1/16

### Four pole 415V, A type

#### 300 mA

4114 33	10	4	10346	1/16
4114 34	16	4	10346	1/16
4114 35	20	4	10346	1/16
4114 36	25	4	10346	1/16

## DX<sup>3</sup> RCD add on module

### For 125A

Conform to IEC 61009-1

AC type : detect AC components faults

Hpi type : detect faults with AC and DC components, increased

Immunity to false tripping

For mounting on the right-hand side of 1.5 module per pole DX<sup>3</sup> MCBs

Easy & fast association mechanism

Terminal cover for locking

70 sq mm terminals

Bold Cat.Nos are products normally available with Legrand (India) Stockists. Cat.Nos that are not bold - delivery within 4 - 8 weeks from the date of order. Bold packing quantity is our mandatory packing. Orders to be placed by Legrand (India) Stockist in multiples of the same.

## RCBOs compact for AC applications



4105 68

Cat.Nos	Nominal Rating	Number of 17.5 mm modules	MRP* ₹ / Unit	Pack
---------	----------------	---------------------------	---------------	------

### Double pole 240V, AC type

#### 30 mA

4105 68	125 A	4	18504	1
---------	-------	---	-------	---

#### 100 mA

4105 69	125 A	4	20866	1
---------	-------	---	-------	---

#### 300 mA

4105 71	125 A	4	20866	1
---------	-------	---	-------	---

### Four pole 415V, AC type

#### 30 mA

4106 25	125 A	4	28594	1
---------	-------	---	-------	---

#### 100 mA

4106 26	125 A	4	31952	1
---------	-------	---	-------	---

#### 300 mA

4106 29	125 A	4	31952	1
---------	-------	---	-------	---

### Double pole 240V, HPI type

#### 30 mA

4105 78	125 A	6	23114	1
---------	-------	---	-------	---

#### 100 mA

4105 79	125 A	6	25836	1
---------	-------	---	-------	---

#### 300 mA

4105 82	125 A	6	25836	1
---------	-------	---	-------	---

### Four pole 415V, HPI type

#### 30 mA

4106 38	125 A	6	39622	1
---------	-------	---	-------	---

#### 100 mA

4106 39	125 A	6	41834	1
---------	-------	---	-------	---

#### 300 mA

4106 42	125 A	6	41834	1
---------	-------	---	-------	---

### Auxiliaries common for MCBs, isolators, RCCBs & RCBOs

Easy & fast fixation on site

On site clip on mounting

Clip on fitting on left side

### Signalling auxiliaries

4062 50	Auxiliary changeover switch 6 A	0.5	1296	1
4062 52	Fault signalling changeover switch 6 A	0.5	1510	1
4062 64	Changeover + fault signalling switch	1	2392	1

4062 50

4062 52

## DX<sup>3</sup> auxiliaries



4062 78



4062 82

Cat.Nos	Description	Number of 17.5 mm modules	MRP* ₹ / Unit	Pack
---------	-------------	---------------------------	---------------	------

### Control auxiliaries

4062 76	Shunt release 12 /48 V AC/ DC	1	3328	1
4062 78	Shunt release 110/415 V V AC	1	3328	1
4062 80	Undervoltage release 24/48 V AC/DC	1	2834	1
4062 82	Undervoltage release 230 V AC	1	2834	1

### Control auxiliaries

4062 86	Pop over voltage release	1	3612	1
4062 90	Motor control 24/48 V AC/ DC	1	13022	1
4062 91	Motor control 110/415 V AC	1	13022	1
4062 93	Motor control 24/48 V AC/ DC	2	24516	1
4062 95	Motor control 110/415 V AC	2	23156	1
4062 88	Automatic resetter	2	17292	1
4062 89	Automatic resetter with autotest	2	21642	1

### Rotary handle

4063 19	Black rotary handle	-	2704	10
4063 20	Yellow/red rotary handle	-	2926	10

### Support for padlock

4063 03	Support for padlock till 63 A	-	626	10
---------	-------------------------------	---	-----	----

### Sealable screw cover

4063 04	Devices upto 63 A	-	620	10
4063 06	For 80-125 A devices	-	1082	10

### 1/2 module spacing unit

4063 07	1/2 module spacing unit	0.5	228	10
---------	-------------------------	-----	-----	----

### 5 mm padlock

4063 13	5 mm Padlock	0.5	530	10
---------	--------------	-----	-----	----

\* MRP - Maximum Retail Price Inclusive of all taxes including GST.

Bold Cat.Nos are products normally available with Legrand (India) Stockists. Cat.Nos that are not bold - delivery within 4 - 8 weeks from the date of order. Bold packing quantity is our mandatory packing. Orders to be placed by Legrand (India) Stockist in multiples of the same.




# Ekinox<sup>3</sup>

Smart Solutions

THE CORE BRICK  
OF YOUR  
INSTALLATION  
IS NOW SMARTER

Intelligent EI

Ekinox<sup>3</sup> Smart Distribution Board allows to measure, monitor and control energy from anywhere. Equipped with smart products like EMDX<sup>3</sup>, CX<sup>3</sup> EMS & intelligent accessories. Ekinox<sup>3</sup> helps to evaluate electrical distribution in real time seamlessly.

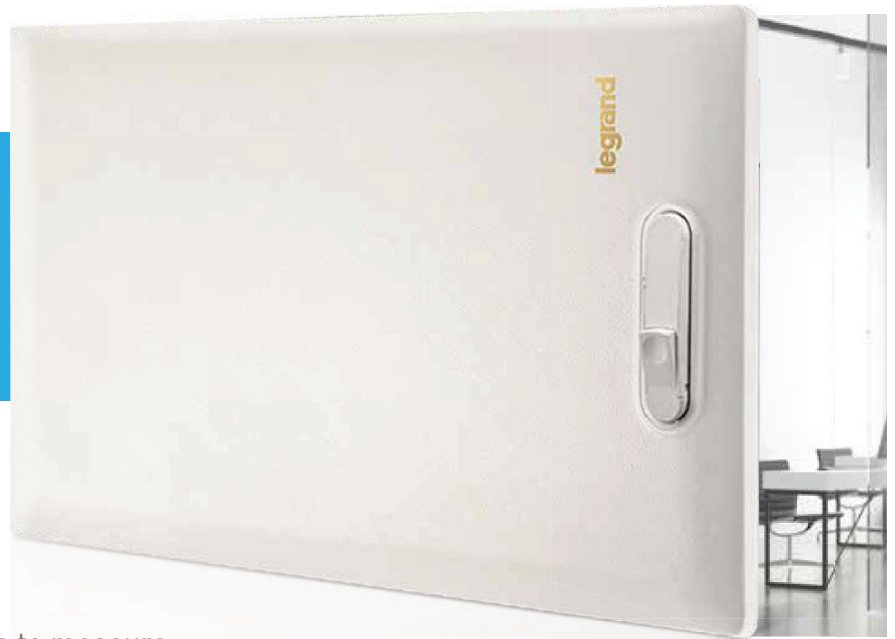

VTPN MCCB + METER BC



Scan to know more about  
the product.



## MIVAN CONSTRUCTION COMPATIBLE EKINOX<sup>3</sup> DB

Mivan Construction Compatible Ekinox<sup>3</sup> distribution boards are made with thick sheets to withstand extreme pressures during the Mivan construction process. The sleek, minimalistic and stylish design enhance the overall ambience of the spaces.



### MIVAN SPN DB

5076 10M	4W
5076 11M	8W
5076 12M	12W
5076 13M	16W
5076 15M	20W

### MIVAN ETPN DB

<b>5076 70M</b>	4W ETPN IP43
<b>5076 71M</b>	6W ETPN IP43
<b>5076 72M</b>	8W ETPN IP43
<b>5076 73M</b>	12W ETPN IP43
<b>5076 74M</b>	16W ETPN IP43

TV/Telephone DBs available on request



Scan to know more about  
the product.

## SALIENT FEATURES

Easily removable knock outs for cable glanding

Stronger glanding plates

Full proof solution

Nut inserts for longer installation life

Innovative door knob

Increased sheet thickness to withstand Mivan Construction challenges

Integrated door earthing system

Slimmest DB with 71 mm depth

Door separately packed

IP 43 degree of protection

Plain look with rounded corners

Wire set, Din rail components, Neutral and Earth bar packed separately in inner assembly set

## Ekinox<sup>3</sup> SPN DB's

for DX<sup>3</sup> MCB, isolator, RCCB and RCBO

Cat.Nos	Number ofWs	No. of modules	MRP* ₹ / Unit	Pack
---------	-------------	----------------	---------------	------

- As per IEC 61439-3
- Suitable for Flush Mounting and Surface Mounting
- With 100 A Copper Busbar
- With Neutral bar, Earthbar and Cable ties for Cable management
- Fully shrouded Neutral bars
- Prefitted masking sheet
- Reversible Door for IP 43 & IP 54 DB's

### IP 30 - #IK 08

5076 00	4W	4	1952	1
5076 01	8W	8	2368	1
5076 02	12W	12	2798	1
5076 03	16W	16	3418	1
5076 04	18W	18	3976	1
5076 05	20W	20	4068	1



5076 05



5076 12

### IP 43 - #IK 09 with metal door

5076 10	4W	4	2558	1
5076 11	8W	8	3128	1
5076 12	12W	12	3758	1
5076 13	16W	16	4792	1
5076 14	18W	18	4948	1
5076 15	20W	20	6030	1

### IP 43 - #IK 09 with acrylic door

5076 20	4W	4	3418	1
5076 21	8W	8	3960	1
5076 22	12W	12	4812	1
5076 23	16W	16	5976	1
5076 24	18W	18	6252	1
5076 25	20W	20	6620	1



5076 42

### IP 54 - #IK 09

5076 40	4W	4	8788	1
5076 41	8W	8	10446	1
5076 42	12W	12	12000	1
5076 43	16W	16	13326	1
5076 44	18W	18	13472	1
5076 45	20W	20	14640	1

## Ekinox<sup>3</sup> ETPN DB's

for DX<sup>3</sup> MCB, isolator, RCCB and RCBO

- As per IEC 61439-3
- Suitable for Flush Mounting and Surface Mounting
- With 100 A Copper Busbar for each phase
- With Neutral bar, Earthbar and Cable ties for Cable management
- Fully insulated busbar & shrouded Neutral bars
- Improved Pan assembly for ease of installation
- Prefitted masking sheet
- Reversible Door for IP 43 & IP 54 DB's
- With provision for FP MCB/Isolator/RCCB/RCBO as incomer and SP MCB's as outgoing
- Supplied with wireset
- Can be converted to PPI DB at site using conversion kit

### IP 30 - #IK 08

5076 60	4W	8+12	5426	1
5076 61	6W	8+18	6730	1
5076 62	8W	8+24	7948	1
5076 63	12W	8+36	11332	1
5076 64	16W	8+48	13802	1
5076 66	20W	8+60	19262	1



5076 82



5077 01



5077 11

## Ekinox<sup>3</sup> ETPN DB's

for DX<sup>3</sup> MCB, isolator, RCCB and RCBO

Cat.Nos	Number ofWs	No. of modules	MRP* ₹ / Unit	Pack
---------	-------------	----------------	---------------	------

### IP 43 - #IK 09 with metal door

5076 70	4W	8+12	6216	1
5076 71	6W	8+18	7688	1
5076 72	8W	8+24	9374	1
5076 73	12W	8+36	13902	1
5076 74	16W	8+48	17402	1
5076 76	20W	8+60	25136	1

### IP 43 - #IK 09 with acrylic door

5076 80	4W	8+12	8474	1
5076 81	6W	8+18	10360	1
5076 82	8W	8+24	12192	1
5076 83	12W	8+36	18884	1
5076 84	16W	8+48	22740	1
5076 86	20W	8+60	30742	1

### IP 54 - #IK 09

5076 90	4W	8+12	21070	1
5076 91	6W	8+18	25354	1
5076 92	8W	8+24	27728	1
5076 93	12W	8+36	39458	1
5076 94	16W	8+48	46894	1
5076 96	20W	8+60	55788	1

## Ekinox<sup>3</sup> Flexy DB

for DX<sup>3</sup> DIN modular products

Cat.Nos	Number of row	No. of modules	MRP* ₹ / Unit	Pack
---------	---------------	----------------	---------------	------

- As per IEC 61439-3
- Suitable for Flush Mounting and Surface Mounting
- Completely flexible to organise the distribution as per site requirements
- Busbars to be selected as per distribution requirements
- With Neutral and Earth bars
- Fully shrouded Neutral bars
- Improved Pan assembly for ease of installation
- Prefitted masking sheet
- Reversible door for IP 43

### IP 30 - #IK 08

5077 01	2 row of 14 M	28	6578	1
5077 02	3 row of 14 M	42	8234	1
5077 03	4 row of 14 M	56	9130	1

### IP 43 - #IK 09 with metal door

5077 05	2 row of 14 M	28	7934	1
5077 06	3 row of 4 M	42	9484	1
5077 07	4 row of 14 M	56	10282	1
5077 14	4 row of 8 M	32	8772	1
5077 15	4 row of 10 M	40	9182	1
5077 12	3 row of 14 M MCCB for DPX <sup>3</sup> 160 MCCB	42	10916	1

### IP 43 - #IK 09 with acrylic door

5077 09	2 row of 14 M	28	8368	1
5077 10	3 row of 14 M	42	10284	1
5077 11	4 row of 14 M	56	11652	1
5077 13	3 row of 14 M MCCB for DPX <sup>3</sup> 160 MCCB	42	12144	1

Bold Cat.Nos are products normally available with Legrand (India) Stockists. Cat.Nos that are not bold - delivery within 4 - 8 weeks from the date of order. Bold packing quantity is our mandatory packing. Orders to be placed by Legrand (India) Stockist in multiples of the same.



## Ekinox<sup>3</sup> TPN DB-VTPN DB's for DX<sup>3</sup> MCB, isolator, RCCB and RCBO

Cat.Nos	Number ofWs	No. of modules	MRP* ₹ / Unit	Pack
---------	-------------	----------------	---------------	------

- As per IEC 61439-3
- Suitable for Flush Mounting and Surface Mounting
- With 100 A Copper Busbar for each phase
- With 2 Neutral bar, 2 Earthbar and Cable ties for Cable management
- Fully insulated busbar & shrouded Neutral bars
- Improved Pan assembly for ease of installation
- Prefitted masking sheet
- Reversible Door for IP 43 & IP 54 DB's
- With provision for FP MCB/Isolator/RCCB/RCBO as incomer and SP/TP MCB's as outgoing



5077 20

### IP 30 - #IK 08

5077 20	4W	8+12	14306	1
5077 21	6W	8+18	15700	1
5077 22	8W	8+24	17464	1
5077 23	12W	8+36	25216	1

### IP 43 - #IK 09 with metal door

5077 25	4W	8+12	15354	1
5077 26	6W	8+18	17004	1
5077 27	8W	8+24	19792	1
5077 28	12W	8+36	26628	1



5077 31

### IP 43 - #IK 09 with acrylic door

5077 30	4W	8+12	19922	1
5077 31	6W	8+18	21920	1
5077 32	8W	8+24	25632	1
5077 33	12W	8+36	34196	1

### IP 54 - #IK 09

5077 35	4W	8+12	31934	1
5077 36	6W	8+18	34722	1
5077 37	8W	8+24	38410	1
5077 38	12W	8+36	49724	1

## Ekinox<sup>3</sup> TPN DB-VTPN DPX<sup>3</sup> 160 MCCB DB's

- As per IEC 61439-3
- Suitable for Flush Mounting and Surface Mounting
- With 250 A Copper Busbar for each phase
- With 2 Neutral bar, 2 Earthbar and Cable ties for Cable management
- Fully insulated busbar & shrouded Neutral bars
- Improved Pan assembly for ease of installation
- Prefitted masking sheet
- Reversible Door for IP 43 & IP 54 DB's
- With provision for DPX<sup>3</sup> 160 MCCB as incomer and SP/TP MCB's as outgoing

### IP 30 - #IK 08

5077 40	4W	DPX <sup>3</sup> 160+12	16334	1
5077 41	6W	DPX <sup>3</sup> 160+18	17470	1
5077 42	8W	DPX <sup>3</sup> 160+24	19024	1
5077 43	12W	DPX <sup>3</sup> 160+36	28816	1

### IP 43 - #IK 09 with metal door

5077 45	4W	DPX <sup>3</sup> 160+12	18748	1
5077 46	6W	DPX <sup>3</sup> 160+18	21278	1
5077 47	8W	DPX <sup>3</sup> 160+24	23442	1
5077 48	12W	DPX <sup>3</sup> 160+36	31958	1



5077 53

## Ekinox<sup>3</sup> TPN DB-VTPN DPX<sup>3</sup> 160 MCCB DB's

Cat.Nos	Number ofWs	No. of modules	MRP* ₹ / Unit	Pack
---------	-------------	----------------	---------------	------

### IP 54 - #IK 09

5077 50	4W	DPX <sup>3</sup> 160+12	37476	1
5077 51	6W	DPX <sup>3</sup> 160+18	42672	1
5077 52	8W	DPX <sup>3</sup> 160+24	46360	1
5077 53	12W	DPX <sup>3</sup> 160+36	61076	1

## Ekinox<sup>3</sup> TPN DB-VTPN DPX<sup>3</sup> 250 MCCB DB's

- As per IEC 61439-3
- Suitable for Flush Mounting and Surface Mounting
- With 250 A Copper Busbar for each phase
- With 2 Neutral bar, 2 Earthbar and Cable ties for Cable management
- Fully insulated busbar & shrouded Neutral bars
- Improved Pan assembly for ease of installation
- Prefitted masking sheet
- Reversible Door for IP 43 & IP 54 DB's
- With provision for DPX<sup>3</sup> 250 MCCB as incomer and SP/TP MCB's as outgoing



5077 55

### IP 30 - #IK 08

5077 55	4W	DPX <sup>3</sup> 250+12	26152	1
5077 56	8W	DPX <sup>3</sup> 250+24	27802	1
5077 57	12W	DPX <sup>3</sup> 250+36	30686	1

### IP 43 - #IK 09 with metal door

5077 58	4W	DPX <sup>3</sup> 250+12	29812	1
5077 59	8W	DPX <sup>3</sup> 250+24	34268	1
5077 60	12W	DPX <sup>3</sup> 250+36	36190	1

### IP 54 - #IK 09

5077 61	4W	DPX <sup>3</sup> 250+12	44210	1
5077 62	8W	DPX <sup>3</sup> 250+24	50522	1
5077 63	12W	DPX <sup>3</sup> 250+36	59040	1



5076 61

## Phase selector neo DB

- As per IEC 61439-3
- Compact and sleek design
- IP 43 protection & IK 09
- Integrated LED indication in the selector switches
- With 100A copper busbar for each phase
- Fully insulated busbar & shrouded Neutral bars

Cat.Nos	Description	MRP* ₹ / Unit	Pack
---------	-------------	---------------	------

## Ekinox<sup>3</sup> TPN DB- Phase selector NEO DBs For DX<sup>3</sup> MCB Isolator, RCCB, RCBO

5077 80N	4W NEO	16564	1
5077 81N	6W NEO	16832	1
5077 82N	8W NEO	18032	1
5077 83N	12W NEO	20308	1



5077 81N

\* MRP - Maximum Retail Price Inclusive of all taxes including GST.  
#IK - Refer pg - 59 for ready reckoner table.

Bold Cat.Nos are products normally available with Legrand (India) Stockists.  
Cat.Nos that are not bold - delivery within 4 - 8 weeks from the date of order.  
Bold packing quantity is our mandatory packing. Orders to be placed by Legrand (India) Stockist in multiples of the same.

## Ekinox<sup>3</sup> TPN DB- 7/8 segment NEO DB's

for DX<sup>3</sup> MCB, isolator, RCCB and RCBO

Cat.Nos	Description	MRP* ₹ / Unit	Pack
---------	-------------	------------------	------

### IP 42 - \*IK 09 with metal door

- As per IEC 61439-3
- DB with phase segmentation and separation between Incomer and Outgoings
- Sturdy & Robust design
- With 100A copper busbar for each phase
- Colour coded Neutral Bars
- Easy to Install : Detachable frame
- 8 compartments
- More number of knockouts
- IP42 & IK09
- Supplied with wire-set
- With provision for DPX<sup>3</sup> 160 MCCB as incomer DP MCB/Isolator/RCCB/RCBO as sub incomers and SP MCB's as outgoing



5078 86N

5078 85N	4W 8/7S IP42 Neo	12766	1
5078 86N	6W 8/7S IP42 Neo	14302	1
5078 87N	8W 8/7S IP42 Neo	16020	1
5078 88N	12W 8/7S IP42 Neo	19944	1

### IP 42- \*IK09 suitable for 160A DPX<sup>3</sup> MCCB as incomer

5078 95N	4W 8/7S 160A MCCB IP42 Neo	17722	1
5078 96N	6W 8/7S 160A MCCB IP42 Neo	20272	1
5078 97N	8W 8/7S 160A MCCB IP42 Neo	23428	1
5078 98N	12W 8/7S 160A MCCB IP42 Neo	26450	1

## Ekinox<sup>3</sup> TPN DB - 7 segment DB's for DX<sup>3</sup> MCB, isolator, RCCB and RCBO

- As per IEC 61439-3
- Separate compartment for incomer, sub-incomer & outgoing devices
- Suitable for Flush Mounting and Surface Mounting
- With 100 A Copper Busbar for each phase
- With Neutral bar, Earthbar and Cable ties for Cable management
- Fully insulated busbar & shrouded Neutral bars
- With provision for FP MCB/Isolator/RCCB/RCBO as incomer, DP RCCB/RCBO as sub incomer and SP MCB's as outgoing
- Supplied with wire set
- DB with phase segmentation and separation between incomer and outgoings

### IP 30 - \*IK 08

5078 80	4W	8+12+12	■	1
5078 81	6W	8+12+18	■	1
5078 82	8W	8+12+24	■	1
5078 83	12W	8+12+36	■	1



5078 86



5078 95



5078 14



5078 22

## Ekinox<sup>3</sup> TPN DB - 7 segment DB's

for DX<sup>3</sup> MCB, isolator, RCCB and RCBO

Cat.Nos	Description	No. of modules	MRP* ₹ / Unit	Pack
---------	-------------	----------------	------------------	------

### IP 43 - \*IK 09 with metal door

5078 85	4W	8+12+12	■	1
5078 86	6W	8+12+18	■	1
5078 87	8W	8+12+24	■	1
5078 88	12W	8+12+36	■	1

## Ekinox<sup>3</sup> TPN DB - 7 segment DB's for 160 A DPX<sup>3</sup> MCCB

- As per IEC 61439-3
- DB with phase segmentation and separation between incomer and Outgoings
- Suitable for Flush Mounting and Surface Mounting
- With 100 A Copper Busbar for each phase
- With Neutral bar, Earthbar and Cable ties for Cable management
- Fully Color Shrouded Insulated bus bar and Neutral bars
- With provision for DPX<sup>3</sup> 160 MCCB as incomer DP MCB/Isolator/RCCB/RCBO as sub incomers and SP MCB's as outgoing
- Supplied with wire set

### IP 30 - \*IK 08

5078 90	4W	DPX <sup>3</sup>	■	1
	160+12+12			
5078 91	6W	DPX <sup>3</sup>	■	1
	160+12+18			
5078 92	8W	DPX <sup>3</sup>	■	1
	160+12+24			
5078 93	12W	DPX <sup>3</sup>	■	1
	160+12+36			

### IP 43 - \*IK 09 with metal door

5078 95	4W	DPX <sup>3</sup>	■	1
	160+12+12			
5078 96	6W	DPX <sup>3</sup>	■	1
	160+12+18			
5078 97	8W	DPX <sup>3</sup>	■	1
	160+12+24			
5078 98	12W	DPX <sup>3</sup>	■	1
	160+12+36			

## Ekinox<sup>3</sup> Metal enclosures

for DX<sup>3</sup> MCB, RCCB, RCBO and DPX<sup>3</sup> MCCB's

- As per IEC 61439-3
- Suitable for Flush Mounting and Surface Mounting
- Suitable for protection of appliances like AC/Geyser etc
- Supplied with Neutral Links
- With provision for mounting modular devices

### \*IK 08

5078 10	10 A SP, 2P+E	1	2452	1
5078 11	20 A SP, 2P+E	1	2642	1
5078 14	20 A DP, 2P+E	2	2870	1
5078 17	20 A TP, 3P+E	3	4862	1
5078 18	32 A TP, 3P+E	3	5768	1
5078 20	20 A DP RCBO, 2P+E	4	2776	1
5078 21	20 A FP RCBO, 2P+E	8	4854	1
5078 22	32 A FP RCBO, 3P+E	8	5722	1

Bold Cat.Nos are products normally available with Legrand (India) Stockists. Cat.Nos that are not bold - delivery within 4 - 8 weeks from the date of order. Bold packing quantity is our mandatory packing. Orders to be placed by Legrand (India) Stockist in multiples of the same.

\* MRP - Maximum Retail Price Inclusive of all taxes including GST.  
■ Price available on request.  
#IK - Refer pg - 59 for ready reckoner table.

## Ekinox<sup>3</sup> P-17 tempra plug & socket DB's for DX<sup>3</sup> MCB, RCCB and RCBO

Cat.Nos	Description	No. of modules	MRP* ₹ / Unit	Pack
---------	-------------	----------------	------------------	------

- As per IEC 61439-3
- Suitable for Flush Mounting and Surface Mounting
- Supplied with Neutral Links
- With provision for mounting modular devices

IK 08

5078 60	16 A 2P+E-DP	2	4004	1
5078 63	32 A 2P+E-DP	2	4328	1
5078 61	32 A 3P+E-FP	8	7246	1
5078 62	32 A 3P+N+E-FP	8	7330	1
5078 64	63 A 3P+N+E-FP	8	18246	1

## Ekinox<sup>3</sup> metal enclosures for DX<sup>3</sup> MCB, RCCB, RCBO and DPX<sup>3</sup> MCCB's

- As per IEC 61439-3
- For independent mounting of DX<sup>3</sup> MCB, RCCB, RCBO, DPX<sup>3</sup> 160, DPX<sup>3</sup> 250, DPX<sup>3</sup> 630 & DRX MCCB's
- IK 08

IK 08

5077 90	SP enclosure	1	662	1
5077 91	DP enclosure	2	954	1
5077 92	TP enclosure	3	950	1
5077 93	FP enclosure	4	954	1
5077 94	FP RCBO enclosure	8	1596	1

## Metal one way enclosures for MCCB

5078 01	DPX <sup>3</sup> 160 MCCB enclosure	3&4	5428	1
5078 02	DPX <sup>3</sup> 250 MCCB enclosure	3&4	9544	1
5078 04	DPX <sup>3</sup> 630 MCCB enclosure	3&4	14826	1
5078 05	DRX 100 MCCB enclosure-TP	3	2930	1
5078 06	DRX 100 MCCB enclosure-FP	4	2762	1

## Ekinox<sup>3</sup> cable end box

Cat.Nos	Description	MRP* ₹ / Unit	Pack
---------	-------------	------------------	------

- Useful for keeping extra cables
- Possible to mount on the top or bottom of the DB
- Provision for mounting terminal blocks
- Can be used as a terminal box adaptor also

For IP 30 DB's

5079 10	For SPN 4 W IP30	966	1
5079 12	For SPN 8 W IP30	1120	1
5079 14	For SPN 12 W/ VTPN/Flexy	1266	1
5079 16	For SPN 16 W/ ETPN 6W DB	1778	1
5079 25	For ETPN 8W DB	3194	1
5079 27	For ETPN 12W DB	4136	1
5079 29	For ETPN 16W DB	4110	1
5079 31	For ETPN 18W DB	4366	1
5079 33	For ETPN 20W DB	4520	1
5079 35	For ETPN 4W VTPN/FLEXY MCB	1254	1
5079 37	For all VTPN MCCB DBS	4620	1

\* MRP - Maximum Retail Price Inclusive of all taxes including GST.

▼ Compatible with Ekinox3 and NEO DB.

IK - Refer pg - 59 for ready reckoner table.

## Ekinox<sup>3</sup> metal enclosures for DX<sup>3</sup> MCB, RCCB, RCBO and DPX<sup>3</sup> MCCB's

Cat.Nos	Description	MRP* ₹ / Unit	Pack
---------	-------------	------------------	------

For IP 43 DB's

5079 11	For SPN 4W DB	1106	1
5079 13	For SPN 8W DB	1350	1
5079 15	For SPN 12W/ VTPN/Flexy DB	1514	1

For IP 43 DB's

5079 17	For SPN 16W/ ETPN 6W DB	2150	1
5079 18	For SPN 18W DB	2152	1
5079 19	For SPN 20/ETPN 8W DB	2248	1
5079 28	For ETPN 12W DB	4826	1
5079 30	For ETPN 16W DB	4918	1
5079 32	For ETPN 18W DB	5014	1
5079 34	For ETPN 20W DB	5304	1
5079 36	For all ETPN 4W/VTPN/Flexy MCB	1514	1
5079 38	For all VTPN MCCB DBs	5376	1
5079 00▼	For 7 segment 4W DB	4396	1
5079 01▼	For 7 segment 6W DB	4824	1
5079 02▼	For 7 segment 8W DB	5380	1
5079 03▼	For 7 segment 12W DB	6082	1

## Ekinox<sup>3</sup> DBs meter box

- Suitable for Mounting DX<sup>3</sup> Metering products
- Possible to mount on the top or bottom of the DB
- Provision for mounting Ammeter/Voltmeter/ASS/VSS
- IK09

Provision for mounting meters

5079 40	For VTPN MCB INCOM IP 30	5954	1
5079 41	For VTPN MCB INCOM IP 43	7306	1
5079 42	For VTPN MCCB INCOM IP 30	6622	1
5079 43	For VTPN MCCB INCOM IP 43	8432	1

## Per phase Isolation kit

5079 44	PPI conversion kit for ETPN 4W DB	3734	1
5079 45	PPI conversion kit for ETPN 6W DB	4210	1
5079 46	PPI conversion kit for ETPN 8W DB	4800	1
5079 47	PPI conversion kit for ETPN 12W DB	5402	1
5079 48	PPI conversion kit for ETPN 16W DB	6040	1

## Panel locks

5079 52	Panel knob for IP 43	412	1
5079 51	Panel knob with key	860	1

Bold Cat.Nos are products normally available with Legrand (India) Stockists. Cat.Nos that are not bold - delivery within 4 - 8 weeks from the date of order. Bold packing quantity is our mandatory packing. Orders to be placed by Legrand (India) Stockist in multiples of the same.

## Ekinox<sup>TM</sup> distribution boards

Cat.Nos	Number of Ws	MRP* ₹ / Unit	Pack
---------	--------------	------------------	------

### Plexo<sup>3</sup> boxes for DX<sup>3</sup>

Self-extinguishing: resistance to incandescent wire 650 °C  
Conform to EN 60439-3

Weatherproof cabinets - IP 65 - IK 09 - Class II

Door and cabinet fully reversible

Removable chassis and faceplates from 2-row versions up

2-position rail for modular products and moulded cases

Spacing between rails 150 mm

Box colour light grey L750A, cover colour dark grey

R746A

6019 32	2 (+1) Module	2244	1
6019 94	4 Module	2426	1
6019 96	6 Module	2770	1
6019 98	8 Module	3462	1

### Cabinets with 12 modules per row

6018 31	1 row 12 modules	5452	1
6018 32	2 rows 24 modules	7564	1
6018 33	3 rows 36 modules	10542	1

### Cabinets with 18 modules per row

6018 35	18 modules x 1 row	6724	1
6018 36	18 modules x 2 rows	11636	1
6018 37	18 modules x 3 rows	16360	1
6018 38	18 modules x 4 rows	24486	1

### Multifunction sleeves for P17

0019 17	For 2 row cabinets	4324	1
0019 18	For 3 row cabinets	6482	1
0019 67	Joining kit	1224	1

### Plexo-S

6018 82	Waterproof cabinet 2M	1794	1
6018 84	Waterproof cabinet 4M	2112	1
6018 86	Waterproof cabinet 6M	2428	1
6018 88	Waterproof cabinet 8M	2988	1
6018 92	Waterproof cabinet 12M	4792	1
6018 94	Waterproof cabinet 24M	6600	1

### Accessories

#### Fixing lugs and blanking plates

0019 69	Set of 4 wall mounting lugs for Plexo, Plexo <sup>3</sup> cabinets and P 17 combined units	■	1
0019 61	5, seperable into modules or 1/2 module Grey RAL 7046	■	20

### Direct piercing end caps

0019 56	Pack consisting of 100 ø20 mm ISO and caps	■	1
0019 57	Pack consisting of 100 ø25 mm ISO and caps	■	1

### Earth terminal and neutral terminal blocks

Brass terminal block with isolated support conform to IEC 60998-2-1/2-2

1348 00	1 X (2x16 <sup>2</sup> + 2x10 <sup>2</sup> ); ICC : 6kA	■	1
1348 01	1 X (3x16 <sup>2</sup> + 3x10 <sup>2</sup> ); ICC : 6kA	■	1
1348 10	2 X (2x16 <sup>2</sup> + 2x10 <sup>2</sup> ); ICC : 6kA	■	1
1348 11	2 X (3x16 <sup>2</sup> + 3x10 <sup>2</sup> ); ICC : 6kA	■	1

\* MRP - Maximum Retail Price Inclusive of all taxes including GST.  
Refer instruction manual for MIVAN (Aluminum shuttering) compatible DB's  
■ Price available on request.  
Note: For Plexo3 Box with integrated Neutral & Earth Bars contact nearest Sales Office

## Distribution boards

Cat.Nos	No. of devices connected	No. of 17.5 mm modules	MRP* ₹ / Unit	Pack
---------	--------------------------	------------------------	------------------	------

### Supply busbars - insulated

#### 63 A copper

#### Pin type

#### SP I/C & SP O/G

4049 26	13	13	448	1
4049 37	57	57	1740	1

#### SPN I/C & SPN O/G

4049 46	6	12	786	1
4049 47	28	56	3252	1

#### TPN I/C & SPN O/G

4049 48	5	12	808	3/30
4049 50	27	56	7938	5/10

#### TP I/C & TP O/G

4049 51	4	12	814	1
4049 52	19	57	7980	1

#### FP I/C & FP O/G

4049 54	3	12	1960	3/30
4049 55	14	56	7938	5/10

#### Fork type

#### SP I/C & SP O/G

4049 56	13	12	448	1
4049 57	57	57	1708	1

#### SPN I/C & SPN O/G250

4049 59	28	56	3252	1
---------	----	----	------	---

#### TP I/C & TP O/G

4049 63	4	12	808	1
4049 64	19	57	4082	1

#### FP I/C & FP O/G

4049 36	14	56	7938	5/10
---------	----	----	------	------

Cat.Nos	Description	MRP* ₹ / Unit	Pack
---------	-------------	------------------	------

### Accessories for fork and pin type busbars

4049 89	End caps for SP	8	6
---------	-----------------	---	---

### Blanking plates

Cat.Nos	Number of Ws	MRP* ₹ / Unit	Pack
---------	--------------	------------------	------

6014 70	-	18	10
---------	---	----	----

Bold Cat.Nos are products normally available with Legrand (India) Stockists.  
Cat.Nos that are not bold - delivery within 4 - 8 weeks from the date of order.  
Bold packing quantity is our mandatory packing. Orders to be placed by Legrand (India) Stockist in multiples of the same.