


# Futuristic **Lighting.** Timeless **Trust.**

LED Price List w.e.f. 1st November 2019

# PRESENCE ACROSS THE NATION

## Location of Crompton Facilities in India

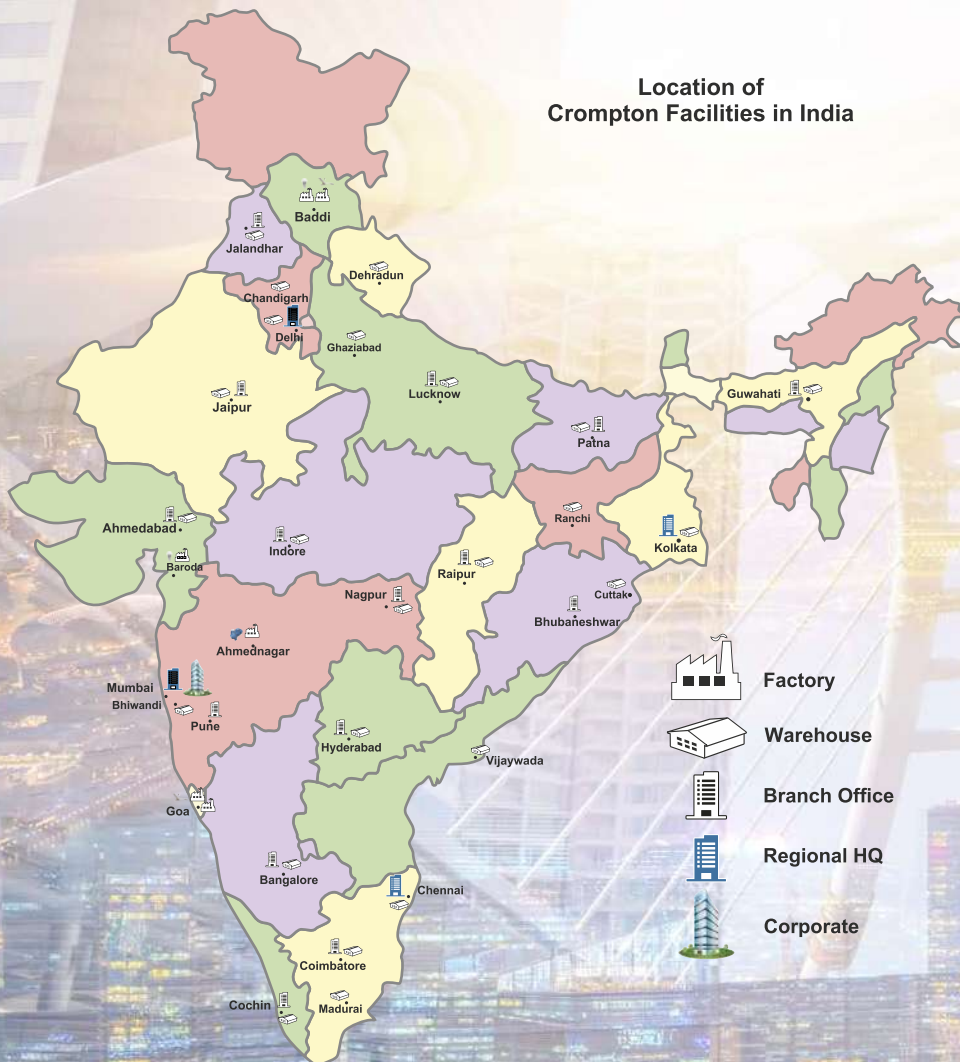



***Traditional craftsmanship. Tomorrow's innovation***


Crompton lighting has been setting the standard for Product quality, reliability and performance. And today we're a lot more than tradition. It's why millions of people in India have come to rely on Crompton to provide comfort and convenience.

Every Crompton product has been meticulously designed and crafted to be more than robust and beautiful. It's why our customers have come to demand Crompton performance time and time again.

Crompton lighting products produce a wow response whenever you enter a household or commercial space. Products that express your personality, that reflects your lifestyle. Products that help you get the most out of all your investments. Precisely engineered, hand crafted and built to last. Our commitment is to provide the best styles and highest industry quality standards in Crompton lighting products and accessories.



**Crompton LED RGBW facade lighting  
installations at BMC head quarter,  
Mumbai.**

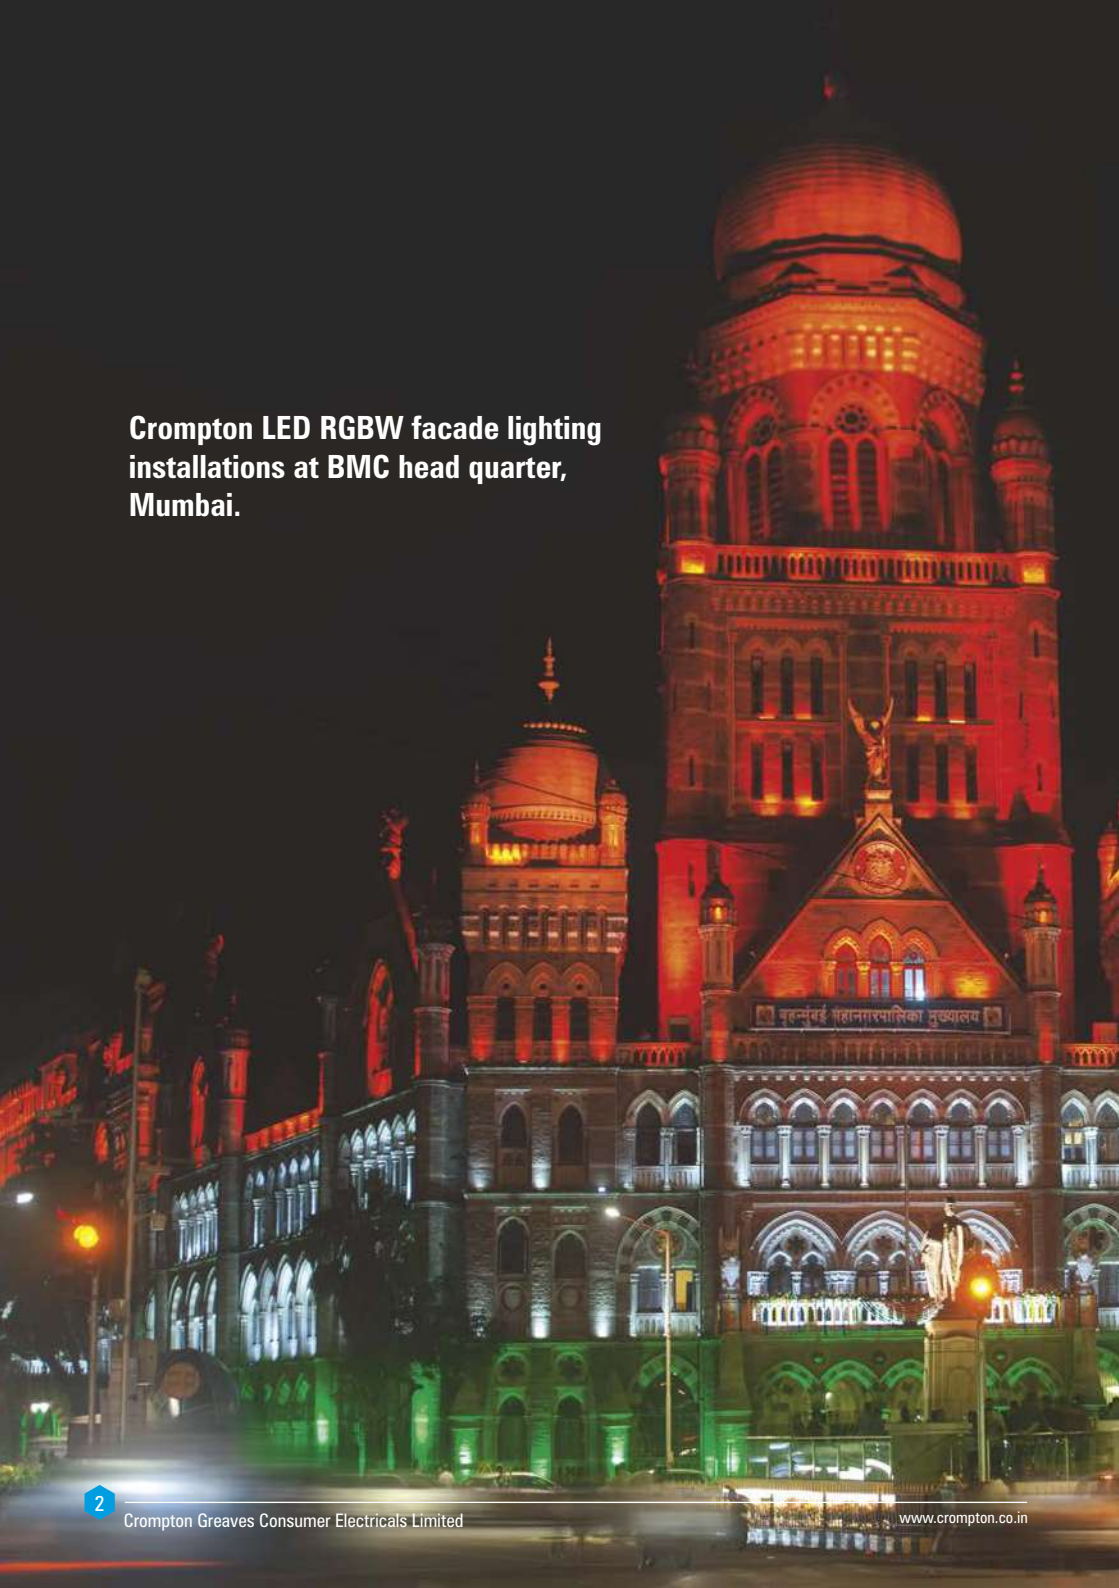

# INDEX

|    |                            |
|----|----------------------------|
| 4  | INDOOR COMMERCIAL LIGHTING |
| 28 | INDUSTRIAL LIGHTING        |
| 32 | BATTEN & LED LAMPS         |
| 36 | CLEANROOM LIGHTING         |
| 38 | FLAMEPROOF LIGHTING        |
| 40 | STREET LIGHTING            |
| 44 | FLOOD LIGHTING             |
| 46 | LANDSCAPE LIGHTING         |
| 51 | SOLAR STREET LIGHTING      |
| 56 | HIGH MAST & POLES          |
| 64 | LIGHTING MANAGEMENT SYSTEM |
| 66 | LED OUTDOOR ACCESSORIES    |





# ***INDOOR COMMERCIAL LIGHTING***



# Human Centric Lighting

## INSPIRED BY THE SUN

### CIRCADIAN RHYTHMS

A circadian rhythm is a natural, internal process that regulates the sleep-wake cycle and repeats roughly every 24 hours.

### HUMAN CENTRIC LIGHT BENEFITS

- Follows Circadian rhythms
- Enhances Mood
- Improves Productivity
- Provides Visual Acuity
- Offers energy savings
- Offers sustainability
- CCT of lights follows circadian rhythm





## HUMAN CENTRIC LIGHTING

**TREND | HCL**

Trend I is an elegant suspended lighting solution with 75mm width and 85mm height. The clean design and high luminance level makes it ideal for corporate offices and institutions.

**Available in Human Centric Lighting**

**Product Description**

CCP-133-40-HCL-SL-BT-DWH

**MRP (₹)**

Price on Request

**STELLUX - P HCL**

LED STELLUX-P Recess mounted Signature series premium commercial luminaire **Available in Human Centric Lighting**



Eco-Friendly

**LG7**

Compliant

**IP20**

Ingress Protection



Recessed Mounted

**<19**

Unified Glare Rating

**Product Description**

CCR-131-30-HCL-SL-BT-DWH

**MRP (₹)**

Price on Request

**STELLUX - I HCL**

LED STELLUX-I Recess mounted Signature series premium commercial luminaire **Available in Human Centric Lighting**



Eco-Friendly

**LG7**

Compliant

**IP20**

Ingress Protection



Recessed Mounted

**<19**

Unified Glare Rating

**Product Description**

CCR-131-30-HCL-SL-BT-DWH

**MRP (₹)**

Price on Request

**STYLO - O HCL**

Stylo - O bring forth innovative design, circle in square shape offering emboss small panel appearance with sleek aluminum PDC body.

**Available in Human Centric Lighting**

**Product Description**

CDR-217-18-HCL-SL-BT-DWH

**MRP (₹)**

Price on Request

**VOGUE**

Vogue is an elegant suspended lighting solution with 52mm width and 75mm height. The clean design and high luminance level makes it ideal for corporate offices and institutions. Create perfectly straight lines using the continuous mounting arrangement or go modular with geometrical shapes. Efficacy 100LM/W





| Product Description  | MRP (₹) |
|----------------------|---------|
| CCP-121-18-57-SL-NWH | 7500    |
| CCP-121-18-40-SL-NWH | 7500    |
| CCP-121-24-57-SL-NWH | 8000    |
| CCP-121-24-40-SL-NWH | 8000    |
| CCP-121-28-57-SL-NWH | 8500    |
| CCP-121-28-40-SL-NWH | 8500    |

**VOGUE CONNECTOR**

VOGUE family can be joined in multiple way like L, Y, T, +.

| TYPE          | MRP (₹)          |
|---------------|------------------|
| L - CONNECTOR | Price On Request |
| Y - CONNECTOR | Price On Request |
| T - CONNECTOR | Price On Request |
| + - CONNECTOR | Price On Request |

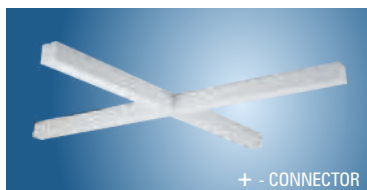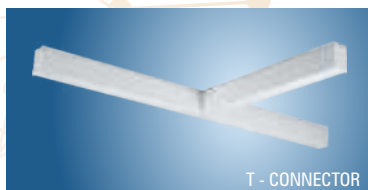

## INDOOR LIGHTING


Crompton

## TREND I

Suspended linear in sleek design is suitable for all commercial spaces.

Available in : 36W - 4 ft, 72W - 8 ft.

\*This luminaire is also available in up down light distribution.

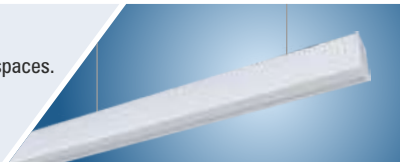


| Product Description | MRP (₹) |
|---------------------|---------|
| LCLP54-36-CDL       | 9000    |
| LCLP54-36-TL        | 9000    |
| LCLP54-36-WW        | 9000    |
| LCLP54-72-CDL       | 16000   |
| LCLP54-72-TL        | 16000   |
| LCLP54-72-WW        | 16000   |

## TREND II

Recessed mounted linear with its minimalistic shape offers complete versatility for all types of spaces such as offices, reception areas, meeting rooms and corridors.

Available in : 30W & 36W - 4 ft.

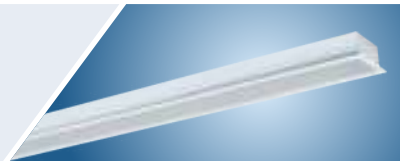

| Product Description | MRP (₹) |
|---------------------|---------|
| LCLR66-30-CDL       | 7500    |
| LCLR66-30-TL        | 7500    |
| LCLR66-30-WW        | 7500    |
| LCLR90-36-CDL       | 8500    |
| LCLR90-36-TL        | 8500    |
| LCLR90-36-WW        | 8500    |





**ORBIT**

Orbit LED cylinders employ the same quality lighting and design configuration to ensure consistent colour point between luminaires within a lighting application. Available in Black and white colour option in 5700K, 4000K, 3000K CCT. Beam angle 36°



New

| Product Description   | MRP (₹)           |
|-----------------------|-------------------|
| CDS-201-15-57-HL2-NWH | 4500              |
| CDS-201-15-40-HL2-NWH | 4500              |
| CDS-201-15-30-HL2-NWH | 4500              |
| CDS-201-20-57-HL2-NWH | 4700              |
| CDS-201-20-40-HL2-NWH | 4700              |
| CDS-201-20-30-HL2-NWH | 4700              |
| CDS-200-25-57-SL-NWH  | 6800              |
| CDS-200-25-40-SL-NWH  | 6800              |
| CDS-200-25-30-SL-NWH  | 6800              |
| CDS-200-30-57-SL-NWH  | 7200              |
| CDS-200-30-40-SL-NWH  | 7200              |
| CDS-200-30-30-SL-NWH  | 7200              |
| SO419005 (15W & 20W)  | Price on Request* |
| SO419006 (25W & 30W)  | Price on Request* |

\* Pendant accessory needs to be ordered separately.

**ORBIT**

Orbit LED cylinders employ the same quality lighting and design configuration to ensure consistent colour point between luminaires within a lighting application. Available in Black and white colour option in 5700K, 4000K, 3000K CCT. Beam angle 36°



New

| Product Description   | MRP (₹)           |
|-----------------------|-------------------|
| CDS-201-15-57-HL2-NBK | 4500              |
| CDS-201-15-40-HL2-NBK | 4500              |
| CDS-201-15-30-HL2-NBK | 4500              |
| CDS-201-20-57-HL2-NBK | 4700              |
| CDS-201-20-40-HL2-NBK | 4700              |
| CDS-201-20-30-HL2-NBK | 4700              |
| CDS-200-25-57-SL-NBK  | 6800              |
| CDS-200-25-40-SL-NBK  | 6800              |
| CDS-200-25-30-SL-NBK  | 6800              |
| CDS-200-30-57-SL-NBK  | 7200              |
| CDS-200-30-40-SL-NBK  | 7200              |
| CDS-200-30-30-SL-NBK  | 7200              |
| SO419005 (15W & 20W)  | Price on Request* |
| SO419006 (25W & 30W)  | Price on Request* |

\* Pendant accessory needs to be ordered separately.

## INDOOR LIGHTING

## FAME SPOT

New series of LED Spot Light specially designed for commercial usage  
Long life with 30000 burning hours with CRI > 80. Wide choice  
available in 3W, 6W, 9W, 12W, 15W, 18W, 24W, 30W, 40W,  
50W, 3000K and 4000K CCT. Beam angel 36°, Vertical Tilt 30°



| Product Description  | MRP (₹) |
|----------------------|---------|
| CDR-210-03-40-SL-NWH | 1000    |
| CDR-210-03-30-SL-NWH | 1000    |
| CDR-211-06-40-SL-NWH | 1300    |
| CDR-211-06-30-SL-NWH | 1300    |
| CDR-211-09-40-SL-NWH | 1550    |
| CDR-211-09-30-SL-NWH | 1550    |
| CDR-212-12-40-SL-NWH | 1750    |
| CDR-212-12-30-SL-NWH | 1750    |
| CDR-212-15-40-SL-NWH | 2000    |
| CDR-212-15-30-SL-NWH | 2000    |
| CDR-213-18-40-SL-NWH | 2600    |
| CDR-213-18-30-SL-NWH | 2600    |
| CDR-213-24-40-SL-NWH | 3000    |
| CDR-213-24-30-SL-NWH | 3000    |
| CDR-214-30-40-SL-NWH | 4000    |
| CDR-214-30-30-SL-NWH | 4000    |
| CDR-215-40-40-SL-NWH | 5100    |
| CDR-215-40-30-SL-NWH | 5100    |
| CDR-215-50-40-SL-NWH | 5800    |
| CDR-215-50-30-SL-NWH | 5800    |

## ZOOM LIGHT

Zoom light offers the most potent solution for indoor focused lighting  
requirements. This product suits the architectural lighting  
requirements for modern offices and commercial spaces.  
Beam angel 36°, Tilt 90°



| Product Description | MRP (₹) |
|---------------------|---------|
| LCSRRA-24-CDL       | 5700    |
| LCSRRA-24-TL        | 5700    |
| LCSRRA-24-WW        | 5700    |

## LUNAR


A timeless classic, the LUNAR is the top of its class when it comes to large disk feature lighting. With a range of 3 sizes, ideal for modern living spaces where design and interest are upper most.



| Product Description | MRP (₹) |
|---------------------|---------|
| LCSUR3-25-CDL       | 7800    |
| LCSUR3-25-TL        | 7800    |
| LCSUR3-25-WWH       | 7800    |
| LCSUR4-36-CDL       | 8800    |
| LCSUR4-36-TL        | 8800    |
| LCSUR4-36-WWH       | 8800    |
| LCSUR6-40-CDL       | 12000   |
| LCSUR6-40-TL        | 12000   |
| LCSUR6-40-WWH       | 12000   |

## EPSILON

The hexagonal Epsilon is meticulously welded to resemble uniform lighting functionally light softens up the overall light source and exemplifies illumination on a grand scale.



New

| Product Description  | MRP (₹) |
|----------------------|---------|
| CCP-128-36-57-SL-NWK | 10000   |
| CCP-128-36-40-SL-NWK | 10000   |
| CCP-128-36-30-SL-NWK | 10000   |

## CAPELLA

The triangular Capella is meticulously welded to resemble uniform lighting functionally light softens up the overall light source and exemplifies illumination on a grand scale.



New

| Product Description  | MRP (₹) |
|----------------------|---------|
| CCP-129-36-57-SL-NBK | 14000   |
| CCP-129-36-40-SL-NBK | 14000   |
| CCP-129-36-30-SL-NBK | 14000   |



## INDOOR LIGHTING

Crompton

## STELLUX - I

LED STELLUX-I Recess mounted Signature series premium commercial luminaire Available in 4000K & 5700K



LG7

Compliant

IP20

Ingress Protection

Recessed Mounted

&lt;19

Unified Glare Rating



| Product Description | MRP (₹) |
|---------------------|---------|
| LCTRI-36-CDL        | 6500    |
| LCTRI-36-TL         | 6500    |
| LCTRI-36-WW         | 6500    |

## STELLUX - P

LED STELLUX-P Recess mounted Signature series premium commercial luminaire Available in 4000K & 5700K



LG7

Compliant

IP20

Ingress Protection

Recessed Mounted

&lt;19

Unified Glare Rating



| Product Description | MRP (₹) |
|---------------------|---------|
| LCTRP-36-CDL        | 7400    |
| LCTRP-36-TL         | 7400    |
| LCTRP-36-WW         | 7400    |

## STELLUX - S

LED STELLUX-S Recess mounted Signature series premium commercial luminaire Available in 4000K & 5700K



LG7

Compliant

IP20

Ingress Protection

Recessed Mounted

&lt;19

Unified Glare Rating



| Product Description | MRP (₹) |
|---------------------|---------|
| LCTRS-36-CDL        | 8200    |
| LCTRS-36-TL         | 8200    |
| LCTRS-36-WW         | 8200    |

## STELLUX - H

LED STELLUX-H Recess mounted Signature series premium commercial luminaire Available in 4000K & 5700K



LG7

Compliant

IP20

Ingress Protection

Recessed Mounted

&lt;19

Unified Glare Rating




| Product Description | MRP (₹) |
|---------------------|---------|
| LCTRH-36-CDL        | 10600   |
| LCTRH-36-TL         | 10600   |
| LCTRH-36-WW         | 10600   |

**POLLUX**

Pollux is a exquisitely designed luminaire which is bound to deliver extra ordinary lumens through its pure form and glare-less light. Recessed full open 2X2 (> 120 Lumen/Watt)

*For Analog and DALI dimming options, please contact CGCEL sales team.*



New

| Product Description | MRP (₹) |
|---------------------|---------|
| LCTLRP-24-FO-CDL    | 6000    |
| LCTLRP-30-FO-CDL    | 6500    |
| LCTLRP-36-FO-CDL    | 7000    |

**POLARIS NIO - I**

LED Recessed full lit luminaire with glare free uniform illumination with longer life and less maintenance. 18W available in 1 ft x 1 ft, all other wattages in 2 ft x 2 ft (> 100 Lumen/Watt)

*For Analog and DALI dimming options, please contact CGCEL sales team.*



| Product Description | MRP (₹) |
|---------------------|---------|
| LCTLRNE-18-CDL(1X1) | 2700    |
| LCTLRNE-18-WW(1X1)  | 2700    |
| LCTLRNE-18-TL(1X1)  | 2700    |
| LCTLRNE-24-FO-CDL   | 4500    |
| LCTLRNE-24-FO-WW    | 4500    |
| LCTLRNE-24-FO-TL    | 4500    |
| LCTLRNE-30-FO-CDL   | 4800    |
| LCTLRNE-30-FO-WW    | 4800    |
| LCTLRNE-30-FO-TL    | 4800    |
| LCTLRNE-36-FO-CDL   | 5000    |
| LCTLRNE-36-FO-WW    | 5000    |
| LCTLRNE-36-FO-TL    | 5000    |

**POLARIS NIO - II**

LED Recessed full lit luminaire with glare free uniform illumination with longer life and less maintenance. Available in 2 ft x 2 ft (> 100 Lumen/Watt)



New


| Product Description  | MRP (₹) |
|----------------------|---------|
| CCR-126-50-57-SL-NWH | 6000    |
| CCR-126-50-40-SL-NWH | 6000    |
| CCR-126-50-30-SL-NWH | 6000    |

## INDOOR LIGHTING

Crompton

**POLARIS NIO - III**

LED Surface full lit luminaire with glare free uniform illumination with longer life and less maintenance. 18W available in 1 ft x 1 ft, all other wattages in 2 ft x 2 ft (> 100 Lumen/Watt)



| Product Description | MRP (₹) |
|---------------------|---------|
| LCTLSNE-18-FO-CDL   | 3000    |
| LCTLSNE-18-FO-TL    | 3000    |
| LCTLSNE-18-FO-WW    | 3000    |
| LCTLSNE-24-FO-CDL   | 5000    |
| LCTLSNE-24-FO-TL    | 5000    |
| LCTLSNE-24-FO-WW    | 5000    |
| LCTLSNE-30-FO-CDL   | 5500    |
| LCTLSNE-30-FO-TL    | 5500    |
| LCTLSNE-30-FO-WW    | 5500    |
| LCTLSNE-36-FO-CDL   | 6000    |
| LCTLSNE-36-FO-TL    | 6000    |
| LCTLSNE-36-FO-WW    | 6000    |

**SPAN**

SPAN is recessed & surface LED 1 ft x 4 ft Panel ceiling light with high performance, commercial grade solution suitable for hospitals, schools, offices and so much more. (> 100 Lumen/Watt)



| Product Description | MRP (₹) |
|---------------------|---------|
| LCTLRNE-40-CDL(1X4) | 6000    |
| LCTLRNE-40-TL(1X4)  | 6000    |
| LCTLRNE-40-WW(1X4)  | 6000    |
| LCTLSNE-40-CDL(1X4) | 6500    |
| LCTLSNE-40-TL(1X4)  | 6500    |
| LCTLSNE-40-WW(1X4)  | 6500    |

**TECHZONE**


Designed with simplicity and attention to detail in mind. This luminaire is perfect for 100 mm recess techzone ceiling.



| Product Description | MRP (₹) |
|---------------------|---------|
| LCRTTZN-40-CDL      | 8200    |
| LCRTTZN-40-WW       | 8200    |
| LCRTTZN-40-TL       | 8200    |

**AURA - I**

Aura I is a edge lit 2 ft x 2 ft slim panel with super bright LED's & highly efficient light-smoothing optics to deliver superior illumination and energy savings year after year

**Product Description**

CCR-127-36-57-SL-NWH

**MRP (₹)**

4500

**AURA - II**

Aura II is edge lit 1 ft x 4 ft slim panel perfect for hospitals, classrooms, offices, and any other work space requiring high quality ambient lighting

**Product Description**

CCR-132-36-57-SL-NWH

**MRP (₹)**

4800





## INDOOR LIGHTING

**VECTOR - I**

Multi angular slim width of the tile makes it seamlessly blend in with the ceiling space. With geometric and aligned designs, the tile can be arranged in a symmetric and abstract way to make the ceiling a piece of art.



| Product Description | MRP (₹) |
|---------------------|---------|
| LCTLRF1-36-CDL      | 6000    |
| LCTLRF1-36-TL       | 6000    |
| LCTLRF1-36-WW       | 6000    |

**VECTOR - II**

Merged octagon shaped slim width of the tile makes it seamlessly blend in with the ceiling space. With geometric and aligned designs, the tile can be arranged in a symmetric and abstract way to make the ceiling a piece of art.



| Product Description | MRP (₹) |
|---------------------|---------|
| LCTLRF2-36-CDL      | 6000    |
| LCTLRF2-36-TL       | 6000    |
| LCTLRF2-36-WW       | 6000    |

**VECTOR - III**

Triangular shaped slim width of the tile makes it seamlessly blend in with the ceiling space. With geometric and aligned designs, the tile can be arranged in a symmetric and abstract way to make the ceiling a piece of art.



| Product Description | MRP (₹) |
|---------------------|---------|
| LCTLRF3-36-CDL      | 6000    |
| LCTLRF3-36-TL       | 6000    |
| LCTLRF3-36-WW       | 6000    |

**VECTOR - IV**

Abstract shaped slim width of the tile makes it seamlessly blend in with the ceiling space. With geometric and aligned designs, the tile can be arranged in a symmetric and abstract way to make the ceiling a piece of art.



| Product Description | MRP (₹) |
|---------------------|---------|
| LCTLRF4-36-CDL      | 6000    |
| LCTLRF4-36-TL       | 6000    |
| LCTLRF4-36-WW       | 6000    |

**VECTOR - V**

Abstract shaped slim width of the tile makes it seamlessly blend in with the ceiling space. With geometric and aligned designs, the tile can be arranged in a symmetric and abstract way to make the ceiling a piece of art.



| Product Description | MRP (₹) |
|---------------------|---------|
| LCTLRF5-36-CDL      | 6000    |
| LCTLRF5-36-TL       | 6000    |
| LCTLRF5-36-WW       | 6000    |

**VECTOR - VI**

Rhombus shaped slim width of the tile makes it seamlessly blend in with the ceiling space. With geometric and aligned designs, the tile can be arranged in a symmetric and abstract way to make the ceiling a piece of art.



| Product Description | MRP (₹) |
|---------------------|---------|
| LCTLRF6-36-CDL      | 6000    |
| LCTLRF6-36-TL       | 6000    |
| LCTLRF6-36-WW       | 6000    |

**VECTOR - VII**

Square shaped Slim width of the tile makes it seamlessly blend in with the ceiling space. With geometric and aligned designs, the tile can be arranged in a symmetric and abstract way to make the ceiling a piece of art.



| Product Description | MRP (₹) |
|---------------------|---------|
| LCTLRF7-36-CDL      | 6000    |
| LCTLRF7-36-TL       | 6000    |
| LCTLRF7-36-WW       | 6000    |

## INDOOR LIGHTING

**STYLO - Q**

Stylo - Q provides square in circle theme, it creates illusion of ceiling merging with luminaire, as the contrast of two primary shapes create a strong form. Efficacy 100LM/W



New

| Product Description | MRP (₹) |
|---------------------|---------|
| LCDRQ-12-CDL        | 1500    |
| LCDRQ-12-WW         | 1500    |
| LCDRQ-12-TL         | 1500    |
| LCDRQ-15-CDL        | 1600    |
| LCDRQ-15-WW         | 1600    |
| LCDRQ-15-TL         | 1600    |

**STYLO - S**

Stylo - S comes with sleek injection module plastic body, integral bezelless design which provides the cleanest lines for the minimal effect, diffuser profile ends in ripples that allows light fade towards the edges. Efficacy 100LM/W



New

| Product Description | MRP (₹) |
|---------------------|---------|
| LCDRS-12-CDL        | 1400    |
| LCDRS-12-WW         | 1400    |
| LCDRS-12-TL         | 1400    |
| LCDRS-15-CDL        | 1500    |
| LCDRS-15-WW         | 1500    |
| LCDRS-15-TL         | 1500    |

**STYLO - O**

Stylo - O bring forth innovative design, circle in square shape offering emboss small panel appearance with sleek aluminum PDC body. Efficacy 100LM/W



New

| Product Description | MRP (₹) |
|---------------------|---------|
| LCDRO-12-CDL        | 1400    |
| LCDRO-12-WW         | 1400    |
| LCDRO-12-TL         | 1400    |
| LCDRO-15-CDL        | 1500    |
| LCDRO-15-WW         | 1500    |
| LCDRO-15-TL         | 1500    |

**PROXIMA - R**

Proxima-R is a high performance low-height back lit downlighter suited for any modern professional workspace. Robust PDC aluminum housing ensures long life. Available in 5700K, 4000K, 3000K CCT Efficacy 100LM/W

*For Analog and DALI dimming options, please contact CGCEL sales team.*



New

| Product Description  | MRP (₹) |
|----------------------|---------|
| CDR-204-06-57-SL-NWH | 1200    |
| CDR-204-06-40-SL-NWH | 1200    |
| CDR-204-06-30-SL-NWH | 1200    |
| CDR-205-12-57-SL-NWH | 1600    |
| CDR-205-12-40-SL-NWH | 1600    |
| CDR-205-12-30-SL-NWH | 1600    |
| CDR-205-15-57-SL-NWH | 1800    |
| CDR-205-15-40-SL-NWH | 1800    |
| CDR-205-15-30-SL-NWH | 1800    |
| CDR-206-18-57-SL-NWH | 2600    |
| CDR-206-18-40-SL-NWH | 2600    |
| CDR-206-18-30-SL-NWH | 2600    |

**PROXIMA - S**

Proxima-S is a high performance low- height downlighter suited for any modern professional workspace. Robust PDC aluminum housing ensures long life. Available in 5700K, 4000K, 3000K CCT Efficacy 100LM/W

*For Analog and DALI dimming options, please contact CGCEL sales team.*



New

| Product Description  | MRP (₹) |
|----------------------|---------|
| CDR-207-06-57-SL-NWH | 1200    |
| CDR-207-06-40-SL-NWH | 1200    |
| CDR-207-06-30-SL-NWH | 1200    |
| CDR-208-12-57-SL-NWH | 1600    |
| CDR-208-12-40-SL-NWH | 1600    |
| CDR-208-12-30-SL-NWH | 1600    |
| CDR-208-15-57-SL-NWH | 1800    |
| CDR-208-15-40-SL-NWH | 1800    |
| CDR-208-15-30-SL-NWH | 1800    |
| CDR-209-18-57-SL-NWH | 2600    |
| CDR-209-18-40-SL-NWH | 2600    |
| CDR-209-18-30-SL-NWH | 2600    |



**PROXIMA - II**

Proxima-II is a high performance low-height back lit downlighter suited for any modern professional workspace. Robust PDC aluminum housing ensures long life. Available in 5700K, 4000K, 3000K CCT Efficacy 100LM/W



New

| Product Description  | MRP (₹) |
|----------------------|---------|
| CDR-216-30-57-SL-NWH | 3200    |
| CDR-216-30-40-SL-NWH | 3200    |
| CDR-216-30-30-SL-NWH | 3200    |
| CDR-216-40-57-SL-NWH | 4000    |
| CDR-216-40-40-SL-NWH | 4000    |
| CDR-216-40-30-SL-NWH | 4000    |



**PEARL ULTIMA - R**

Round recess mounted LED edge lit slim downlight with die-cast aluminum housing finished in premium white powder coating.  
Efficacy 100lm/w



| Product Description | MRP (₹) |
|---------------------|---------|
| LSCRM-6W-CDL        | 850     |
| LSCRM-6W-NW         | 850     |
| LSCRM-6W-WW         | 850     |
| LSCRM-12W-CDL       | 1100    |
| LSCRM-12W-NW        | 1100    |
| LSCRM-12W-WW        | 1100    |
| LSCRM-15W-CDL       | 1400    |
| LSCRM-15W-NW        | 1400    |
| LSCRM-15W-WW        | 1400    |
| LSCRM-18W-CDL       | 1600    |
| LSCRM-18W-NW        | 1600    |
| LSCRM-18W-WW        | 1600    |

**PEARL ULTIMA- S**

Square recess mounted LED edge lit slim downlight with die-cast aluminum housing finished in premium white powder coating.  
Efficacy 100lm/w



| Product Description | MRP (₹) |
|---------------------|---------|
| LSCSM-6W-CDL        | 850     |
| LSCSM-6W-NW         | 850     |
| LSCSM-6W-WW         | 850     |
| LSCSM-12W-CDL       | 1100    |
| LSCSM-12W-NW        | 1100    |
| LSCSM-12W-WW        | 1100    |
| LSCSM-15W-CDL       | 1400    |
| LSCSM-15W-NW        | 1400    |
| LSCSM-15W-WW        | 1400    |
| LSCSM-18W-CDL       | 1600    |
| LSCSM-18W-NW        | 1600    |
| LSCSM-18W-WW        | 1600    |

## INDOOR LIGHTING

**PEARL NIOS - R**


Round surface mounted LED panel. PDC aluminum housing and high translucent frosted plastic diffuser makes it a robust Luminaire. Efficacy 100lm/w



| Product Description | MRP (₹) |
|---------------------|---------|
| LCDSPN-R-06-CDL     | 1000    |
| LCDSPN-R-06-NW      | 1000    |
| LCDSPN-R-06-VW      | 1000    |
| LCDSPN-R-12-CDL     | 1450    |
| LCDSPN-R-12-NW      | 1450    |
| LCDSPN-R-12-VW      | 1450    |
| LCDSPN-R-18-CDL     | 2000    |
| LCDSPN-R-18-NW      | 2000    |
| LCDSPN-R-18-VW      | 2000    |

**PEARL NIOS - S**

Square surface mounted LED panel. PDC aluminum housing and high translucent frosted plastic diffuser makes it a robust Luminaire. Efficacy 100lm/w



| Product Description | MRP (₹) |
|---------------------|---------|
| LCDSPN-S-06-CDL     | 1000    |
| LCDSPN-S-06-NW      | 1000    |
| LCDSPN-S-06-VW      | 1000    |
| LCDSPN-S-12-CDL     | 1450    |
| LCDSPN-S-12-NW      | 1450    |
| LCDSPN-S-12-VW      | 1450    |
| LCDSPN-S-18-CDL     | 2000    |
| LCDSPN-S-18-NW      | 2000    |
| LCDSPN-S-18-VW      | 2000    |

**QUARTZ + R**


Slim design LED recessed round polycarbonate housing down lighter with superior light output and integral driver.  
Efficacy 100lm/w



| Product Description | MRP (₹) |
|---------------------|---------|
| LCDEP-06-CDL.       | 520     |
| LCDEP-06-NW.        | 520     |
| LCDEP-06-WW         | 520     |
| LCDEP-09-CDL.       | 550     |
| LCDEP-09-NW         | 550     |
| LCDEP-09-WW         | 550     |
| LCDEP-12-CDL.       | 850     |
| LCDEP-12-NW         | 850     |
| LCDEP-12-WW         | 850     |
| LCDEP-15-CDL.       | 900     |
| LCDEP-15-NW.        | 900     |
| LCDEP-15-WW         | 900     |
| LCDEP-18-CDL.       | 1280    |
| LCDEP-18-NW.        | 1280    |
| LCDEP-18-WW.        | 1280    |

**QUARTZ + S**

Slim design LED recessed round down lighter polycarbonate housing with superior light output and integral driver.  
Efficacy 100lm/w



| Product Description | MRP (₹) |
|---------------------|---------|
| LSDEP-06-CDL.       | 520     |
| LSDEP-06-NW.        | 520     |
| LSDEP-06-WW         | 520     |
| LSDEP-09-CDL.       | 550     |
| LSDEP-09-NW         | 550     |
| LSDEP-09-WW         | 550     |
| LSDEP-12-CDL.       | 850     |
| LSDEP-12-NW         | 850     |
| LSDEP-12-WW         | 850     |
| LSDEP-15-CDL.       | 900     |
| LSDEP-15-NW.        | 900     |
| LSDEP-15-WW         | 900     |
| LSDEP-18-CDL.       | 1280    |
| LSDEP-18-NW.        | 1280    |
| LSDEP-18-WW.        | 1280    |

## INDOOR LIGHTING

**ROYAL RIMLESS - R**

Royal Rimless - R is a surface mounted LED panel injection molded in thermally conductive engineered plastic - FR V0 grade housing, diffuser with high optically efficient material.




New

| Product Description | MRP (₹) |
|---------------------|---------|
| LCRP-06-CDL         | 550     |
| LCRP-10-CDL         | 700     |
| LCRP-15-CDL         | 950     |
| LCRP-20-CDL         | 1400    |
| LCRP-06-NW          | 550     |
| LCRP-10-NW          | 700     |
| LCRP-15-NW          | 950     |
| LCRP-20-NW          | 1400    |
| LCRP-06-WW          | 550     |
| LCRP-10-WW          | 700     |
| LCRP-15-WW          | 950     |
| LCRP-20-WW          | 1400    |

**ROYAL RIMLESS - S**

Royal Rimless - S is a surface mounted LED panel injection molded in thermally conductive engineered plastic - FR V0 grade housing, diffuser with high optically efficient material.




New

| Product Description | MRP (₹) |
|---------------------|---------|
| LSRP-06-CDL         | 550     |
| LSRP-10-CDL         | 700     |
| LSRP-15-CDL         | 950     |
| LSRP-20-CDL         | 1400    |
| LSRP-06-NW          | 550     |
| LSRP-10-NW          | 700     |
| LSRP-15-NW          | 950     |
| LSRP-20-NW          | 1400    |
| LSRP-06-WW          | 550     |
| LSRP-10-WW          | 700     |
| LSRP-15-WW          | 950     |
| LSRP-20-WW          | 1400    |



**BRIGHT LINEA**

High-quality materials and design. Extruded aluminum housing enhances safety. High quality PC Diffuser. Reliable and robust housing structure, maximize the endurance over the life time. Slim Integrated design, easy to install Efficacy : 125 lumen/watt

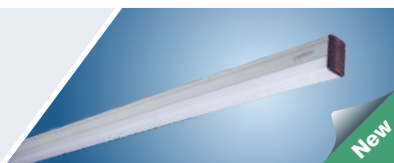

New

**Product Description**

CCS-100-20-65-HL2-DP-NWH

**MRP (₹)**

850

**TRIMLINE**

Trimline is a robust and high performance batten. This LED luminaire comprises of extruded channel in thermally conductive material. High translucent serrated milky white diffuser is used to get glare free and smooth light distribution. Efficacy : 100 lumen/watt



New

**Product Description**

LDL-05-CDL

**MRP (₹)**

410

LDL-05-NW

410

LDL-05-WW

410

LDL-10-CDL

550

LDL-10-NW

550

LDL-10-WW

550

LDL-20-CDL

800

LDL-20-NW

800

LDL-20-WW

800

LDL-40-CDL

1200

LDL-40-NW

1200

LDL-40-WW

1200

**TRIM LINEA**

Trimline is a PC batten. Compact appearance, simple and versatile in nature makes it as long lasting, efficient solution for offices and other commercial spaces. Efficacy : 100 lumen/watt

**Product Description**

LCTLN-10-CDL

**MRP (₹)**

510

LCTLN-10-NW

510

LCTLN-10-WW

510

LCTLN-20-CDL

620

LCTLN-20-WW

620

LCTLN-20-NW


620

## INDOOR LIGHTING

Crompton

## UNILITE

Compact commercial batten suitable for single T8 LED tube.  
*LED tube to be ordered separately*



| Product Description | MRP (₹) |
|---------------------|---------|
| DMLN1LT8-8          | 250     |
| DMLN1LT8-16         | 280     |





# INDUSTRIAL LIGHTING

**SURROUND HYPERION**

Very high efficiency round highbay in PDC housing suitable for industrial application. The luminaire has efficacy upto 150Lm/W to reduce quantity/wattage thereby reducing operational cost. Ingress protection of IP66.



| Product Description           | MRP (₹) |
|-------------------------------|---------|
| CIP-320-80-57-60D-HL5-GL-NSR  | 19000   |
| CIP-320-80-57-90D-HL5-GL-NSR  | 19000   |
| CIP-320-100-57-60D-HL4-GL-NSR | 21000   |
| CIP-320-100-57-90D-HL4-GL-NSR | 21000   |
| CIP-320-120-57-60D-HL4-GL-NSR | 23000   |
| CIP-320-120-57-90D-HL4-GL-NSR | 23000   |
| CIP-320-140-57-60D-HL4-GL-NSR | 25000   |
| CIP-320-150-57-60D-HL4-GL-NSR | 26000   |

**SURROUND ULTRA**

High efficiency round highbay in PDC housing suitable for industrial application. The luminaire has efficacy upto 130Lm/W to reduce quantity/wattage thereby reducing operational cost. Ingress protection of IP66.



| Product Description  | MRP (₹) |
|----------------------|---------|
| LHB11-80-CDL/60-HPM  | 15000   |
| LHB11-100-CDL/60-HPM | 17000   |
| LHB11-120-CDL/60-HPM | 19000   |
| LHB11-140-CDL/60-HPM | 21000   |
| LHB11-150-CDL/60-HPM | 22000   |

**SURROUND NEO**

High efficiency round highbay in PDC housing suitable for industrial application. The luminaire has efficacy of 110Lm/w reduce quantity / wattage thereby reducing operational cost. Ingress protection of IP66.



| Product Description | MRP (₹) |
|---------------------|---------|
| LHB11-80-CDL/60-M   | 12000   |
| LHB11-100-CDL/60-M  | 13000   |
| LHB11-120-CDL/60-M  | 14000   |
| LHB11-140-CDL/60-M  | 16000   |
| LHB11-150-CDL/60-M  | 17000   |



**JUPITER NEO**

Highbay with innovatively designed heat sink for superior thermal management making it a perfect solution for industrial application. The Luminaire has an efficacy of 110 Lm/w. Ingress protection of IP66.



| Product Description | MRP (₹) |
|---------------------|---------|
| LHB-80-CDL/60-M     | 13000   |
| LHB-100-CDL/60-M    | 14500   |
| LHB-120-CDL/60-M    | 16000   |
| LHB-140-CDL/60-M    | 17000   |
| LHBN-150-CDL/60-M   | 18000   |
| LHB11-180-CDL/60-M  | 20000   |
| LHB11-200-CDL/60-M  | 21500   |

**SUPRA NEO-I**

Wellglass in PDC Aluminium housing with finless design and excellent thermal management offering high durability and superior performance with energy saving and having efficacy of 110 Lm/w. Ingress protection of IP66.



| Product Description | MRP (₹) |
|---------------------|---------|
| LWV12-30-(CDL)      | 3600    |
| LWV12-35-(CDL)      | 3800    |
| LWV12-40-(CDL)      | 4000    |

**SUPRA ULTRA-I**

High efficacy Wellglass which consumes lesser energy and maintains high lighting levels. Luminaire efficacy of 125Lm/Watt to reduce quantity/wattage thereby reducing operational cost. Ingress protection of IP66.



New

| Product Description | MRP (₹) |
|---------------------|---------|
| LWV12-30-(CDL)-HP   | 5100    |
| LWV12-35-(CDL)-HP   | 5300    |
| LWV12-40-(CDL)-HP   | 5500    |

**SUPRA NEO-II**

Highly reliable Wellglass with superior technology which consumes lesser energy with high lighting levels. Superior tapered fin design with exceptional thermal management having an efficacy of 110 Lm/w. Ingress protection of IP66.



| Product Description | MRP (₹) |
|---------------------|---------|
| LWV12-70-(CDL)      | 7800    |



**NEPTUNE NEO-II**

PDC Aluminium constructed recessed mounted under canopy luminaire with superior aesthetic finish and high reliability making it an ideal solution for petrol pumps and having efficacy of 110 Lm/w. Ingress protection of IP66. Available in 600mmX 600mm frame



| Product Description                                                                                     | MRP (₹) |
|---------------------------------------------------------------------------------------------------------|---------|
| LCNP-80-CDL/60-M                                                                                        | 10000   |
| LCNP-80-CDL/60-M(600)  | 12000   |

**NEPTUNE ULTRA-II**

High efficacy under canopy which consumes lesser energy and maintains high lighting levels. Luminaire efficacy of 125Lm/Watt to reduce quantity/wattage thereby reducing operational cost. Ingress protection of IP66. Available in 600mmx 600mm frame



| Product Description                                                                                  | MRP (₹) |
|------------------------------------------------------------------------------------------------------|---------|
| LCNP-80-CD60HPM                                                                                      | 12000   |
| LCNP-80-CD60HPM600  | 15000   |

**SUNRISE**

Pressure Die Cast Al housing bulkhead for multiple application. IP65 protected



| Product Description | MRP (₹) |
|---------------------|---------|
| LBHE-10-CDL         | 2100    |

**STUD**

Perfect for interior and exterior applications within car parks, walkways, stairwells, corridors, Local authorities and housing associations as well as commercial buildings.



| Product Description | MRP (₹) |
|---------------------|---------|
| LBHP-10-CDL         | 1200    |

## ***BATTEN & LED TUBES***

**SHIELD NEO**

Weatherproof integrated LED Batten suitable for various industrial application in 4 ft for wattage of 40W & 20W. Luminaire has an efficacy of 110 Lm/w. Ingress protection of IP65.



New

| Product Description     | MRP (₹) |
|-------------------------|---------|
| CIS-300-40-57-SL-DP-NGR | 4600    |
| CIS-300-20-57-SL-DP-NGR | 4200    |

**SHIELD**

Surface/Suspended waterproof industrial luminaire with polycarbonate housing and diffuser suitable for single and twin 4 ft T8 tube.

Ingress protection of IP66.


LED tubes to be ordered separately.



| Product Description | MRP (₹) |
|---------------------|---------|
| IPFC111LT8-16       | 1900    |
| IPFC112LT8-16       | 2200    |

**SHELTER**

High Performance integrated IP20 LED Batten to create a sustainable lighting environment with surface/suspended mounting having an efficacy of 110 Lm/w.

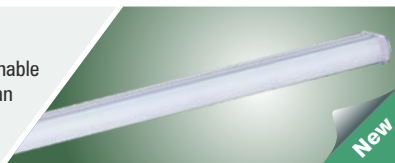


New

| Product Description     | MRP (₹) |
|-------------------------|---------|
| CIS-305-40-57-SL-DP-NWH | 2700    |

**SHELTER ULTRA**

High efficacy integrated IP20 LED Batten to create a sustainable lighting environment with surface/suspended mounting having an efficacy of 120 Lm/Watt

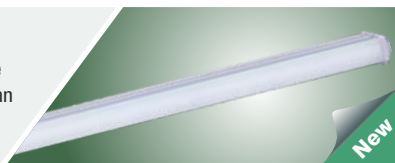


New

| Product Description      | MRP (₹) |
|--------------------------|---------|
| CIS-305-40-57-HL2-DP-NWH | 3300    |

**ECO**

Compact industrial batten suitable for single T8 LED tube


LED tubes to be ordered separately

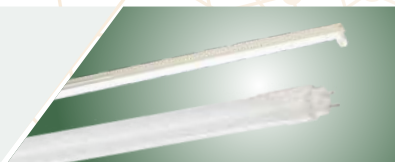

| Product Description | MRP (₹) |
|---------------------|---------|
| DIJB12LT8-20        | 350     |

**ECO-I**

Highly robust Industrial Box type luminaire suitable for single and twin T8 LED Tube  
*LED tubes to be ordered separately*



| Product Description | MRP (₹) |
|---------------------|---------|
| IGP161LT8-16        | 550     |
| IGP162LT8-16        | 600     |

**ULTRON**


LED polycarbonate T8 tube with in built driver with metal heat sink.  
 Double sided connection.



| Product Description | MRP (₹) |
|---------------------|---------|
| LT8-8-565-2         | 600     |
| LT8-20-865-(2)      | 650     |

**CRYSTA**


LED Glass T8 tube with in built driver.  
 Double sided connection.

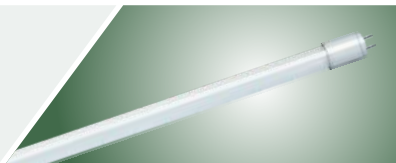

| Product Description | MRP (₹) |
|---------------------|---------|
| LGT8-16-865-2       | 450     |
| LGT8-20-865-2       | 500     |

**SECURE**

LED T8 tube with extruded Al body, PC diffuser and inbuilt driver  
 Double sided connection.

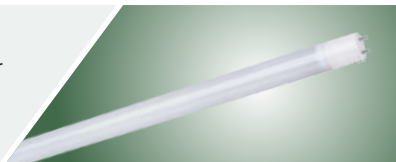

| Product Description | MRP (₹) |
|---------------------|---------|
| LTT8-8              | 700     |
| LTT8-16             | 750     |
| LTT8-20             | 800     |







# ***CLEANROOM LIGHTING***

**CLEANLUX I**

Recessed mounted bottom opening LED Cleanroom luminaire (2X2).  
CRCA powder coated housing. SS Frame available on request. IP 54  
LCBOR-24-CDL is (1x1)



| Product Description | MRP (₹) |
|---------------------|---------|
| LCBOR-24-CDL        | 6500    |
| LCBOR-40-CDL        | 10000   |
| LCBOR-50-CDL        | 12000   |
| LCBOR-60-CDL        | 12500   |

**CLEANLUX II**

Recessed mounted bottom opening LED Cleanroom luminaire (1X4).  
CRCA powder coated housing. SS Frame available on request. IP 54



| Product Description | MRP (₹) |
|---------------------|---------|
| LCBOR-40-CDL(1X4)   | 11000   |
| LCBOR-50-CDL(1X4)   | 13000   |
| LCBOR-60-CDL(1X4)   | 18000   |

**CLEANLUX III**

Recessed mounted bottom opening LED Cleanroom luminaire (1X2).  
CRCA powder coated housing. SS Frame available on request. IP 54



| Product Description | MRP (₹) |
|---------------------|---------|
| LCBOR-40-CDL(1X2)   | 8000    |

**CLEANLUX IV**

Recessed mounted top opening LED Cleanroom luminaire (2X2).  
CRCA powder coated housing. SS Frame available on request. IP 65  
LCTOR-24-CDL is (1x1)




| Product Description | MRP (₹) |
|---------------------|---------|
| LCTOR-24-CDL        | 8500    |
| LCTOR-40-CDL        | 12500   |
| LCTOR-50-CDL        | 14500   |
| LCTOR-60-CDL        | 15500   |

# FLAMEPROOF LIGHTING

### FIAMMA I

CIMFR certified LED flameproof batten suitable for single and twin T8 tube of 8W. Recommended for Gas/Vapor group of IIA & IIB and Zone 1 & 2. IP65 Protected.

*LED tubes to be ordered separately*




| Product Description | MRP (₹) |
|---------------------|---------|
| EXTN1LT8-8          | 10000   |
| EXTN2LT8-8          | 11000   |

### FIAMMA II

CIMFR certified LED flameproof batten suitable for single and twin T8 tube of 16W/20W. Recommended for Gas/Vapor group of IIA & IIB and Zone 1 & 2. IP65 Protected.

*LED tubes to be ordered separately*



| Product Description | MRP (₹) |
|---------------------|---------|
| EXTN1LT8-16/20      | 11500   |
| EXTN2LT8-16/20      | 12500   |

### GLAZE PRO

CIMFR certified LED flameproof Wellglass in die cast Al housing with heat resistant toughened glass. Recommended for Gas/Vapor group of IIA & IIB and Zone 1 & 2. IP65 protected.




| Product Description | MRP (₹) |
|---------------------|---------|
| FWL1315-30-CDL      | 11500   |
| FWL1315-40-CDL      | 13500   |
| FWL1315-60-CDL      | 14500   |



# ***STREET LIGHTING***

**ASTRA NEO**

ASTRA NEO LED streetlight made up of pressure die cast housing with toughened glass and high power LEDs with option of secondary optic with IP66 protection. External SPD to be ordered separately.  
Efficacy : 110LM/W



| Product Description | MRP (₹) |
|---------------------|---------|
| LSTS-20-CDL-M       | 2200    |
| LSTS-20-CDL/NL-M    | 2100    |
| LSTS-25-CDL-M       | 2300    |
| LSTS-25-CDL/NL-M    | 2200    |
| LSTS-30-CDL-M       | 3100    |
| LSTS-30-CDL/NL-M    | 3000    |

**FREEDOM NEO**

FREEDOM NEO LED streetlight made up of pressure die cast housing with toughened glass and high power LEDs with option of secondary optic with IP65 protection. External SPD to be ordered separately.  
Efficacy : 110LM/W



| Product Description                                                                             | MRP (₹) |
|-------------------------------------------------------------------------------------------------|---------|
| LSTS-36-CDL-M  | 5000    |
| LSTS-40-CDL-M                                                                                   | 5200    |
| LSTS-45-CDL-M                                                                                   | 5500    |

**NEXUS NEO**

NEXUS NEO LED streetlight made up of pressure die cast aluminium housing with toughened glass and high power LEDs and secondary lenses with IP66 Protection. 10KV SPD included.  
Efficacy : 110LM/W



| Product Description | MRP (₹) |
|---------------------|---------|
| LSTP-60-CDL-M       | 7000    |
| LSTP-72-CDL-M       | 8000    |
| LSTP-90-CDL-M       | 10000   |

**NEXUS STAR NEO**

NEXUST STAR NEO LED streetlight made up of pressure die cast aluminium housing with toughened glass and high power LEDs and secondary lenses with IP66 protection. 10KV SPD included.  
Efficacy : 110LM/W




| Product Description                                                                                | MRP (₹) |
|----------------------------------------------------------------------------------------------------|---------|
| LSTP-100-CDL-M                                                                                     | 11000   |
| LSTP-120-CDL-M                                                                                     | 14000   |
| LSTP-150-CDL-M  | 16000   |

## STREET LIGHTING

**PINNACLE NEO**


Pinnacle NEO LED streetlight made up of pressure die cast aluminum housing with polycarbonate cover and high power LEDs and secondary lenses with IP66 protection. SPD to be ordered separately. Efficacy : 100LM/W



| Product Description | MRP (₹) |
|---------------------|---------|
| LST-20-CDL-M        | 2400    |
| LST-20-CDL-M/NL     | 2300    |
| LST-25-CDL-M        | 3000    |
| LST-25-CDL-M/NL     | 2800    |

**PINNACLE PLUS**


Pinnacle Plus LED streetlight made up of pressure die cast aluminium housing with integrated polycarbonate lens, high power Ceramic LEDs with IP66 protection. 10KV SPD included. Efficacy : 110LM/W



| Product Description | MRP (₹) |
|---------------------|---------|
| LST-60-CDL          | 6800    |
| LST-70-CDL          | 7800    |

**ORION NEO**

Orion Neo LED streetlight made up of pressure die cast aluminum housing with polycarbonate cover and high power LEDs and secondary lenses with IP66 protection. 10KV SPD included. Efficacy : 110LM/W




New

| Product Description | MRP (₹) |
|---------------------|---------|
| LST-60-CDL-M        | 6500    |
| LST-70-CDL-M        | 7500    |
| LST-90-CDL-M        | 9500    |

**VEGA**

New generation LED street light with highly optimised and efficient lighting distribution made from Die cast aluminum housing, high power ceramic LEDs with integrated lens and IP66 protection. Efficacy : 110LM/W



New

| Product Description | MRP (₹) |
|---------------------|---------|
| LSTV-45-CDL         | 5500    |

**HAWK NEO**

Aerodynamically designed street light having inbuilt tilting angle arrangement with excellent thermal management, made from aluminium die cast housing, high power LEDs and secondary lenses with IP66 protection. Efficacy of >110LPW. 10KV SPD included.



New

| Product Description | MRP (₹) |
|---------------------|---------|
| LSTN1-170-CDL-A-M   | 22000   |
| LSTN1-180-CDL-A-M   | 23000   |

**HAWK II NEO**

Aerodynamically designed street light having inbuilt tilting angle arrangement with excellent thermal management, made from aluminium die cast housing, high power LEDs and secondary lenses with IP66 protection. System efficacy of >110LPW. 10KV SPD included.



New

| Product Description | MRP (₹) |
|---------------------|---------|
| LSTN-200-CDL-A-M    | 24000   |
| LSTN-220-CDL-A-M    | 26000   |
| LSTN-250-CDL-A-M    | 29000   |

**HAWK II NEO (HP)**

Aerodynamically designed street light having inbuilt tilting angle arrangement with excellent thermal management, made from aluminium die cast housing, high power LEDs and secondary lenses with IP66 protection. System efficacy of >125LPW. 10KV SPD included.



New

| Product Description | MRP (₹) |
|---------------------|---------|
| LSTN-200-CDL-AHP-M  | 31000   |
| LSTN-220-CDL-AHP-M  | 33500   |
| LSTN-250-CDL-AHP-M  | 35000   |



## ***FLOOD LIGHTING***

**PROFILE+ NEO**

LED floodlight made up of pressure die cast aluminium housing with toughened glass and high power LEDs and secondary lenses with IP66 protection. Option for 3000K. 10KV SPD included.



| Product Description | MRP (₹) |
|---------------------|---------|
| LFL-50-CDL/60-M     | 5800    |
| LFL-60-CDL/60-M     | 6200    |
| LFL-80-CDL/60-M     | 9000    |

**PLUTO NEO**

LED floodlight made up of pressure die cast aluminium housing with toughened glass and high power LEDs and secondary lenses with IP66 protection. System efficacy  $\geq 110$ LPW. Option for 3000K. 10KV SPD included.



| Product Description | MRP (₹) |
|---------------------|---------|
| LFLN-120-CDL/60-M   | 12800   |
| LFLN-135-CDL/60-M   | 13200   |
| LFLN-150-CDL/60-M   | 15000   |
| LFLN-180-CDL/60-M   | 19500   |
| LFLN-200-CDL/60-M   | 20500   |

**SECURE NEO**


LED floodlight made up of pressure die cast aluminium housing with toughened glass and high power LEDs and secondary lenses with IP66 protection. System efficacy of  $\geq 110$ LPW. Option for 3000K. 10KV SPD included.



| Product Description | MRP (₹) |
|---------------------|---------|
| LSFO-250-CDL/60-M   | 32000   |
| LSFO-300-CDL/60-M   | 35000   |
| LSFO-350-CDL/60-M   | 38000   |

**MAGPIE NEO**

Unique modular LED floodlight made up of pressure die cast aluminium housing with toughened glass and high power LEDs and secondary lenses with IP66 protection. Option for 3000K. 10KV SPD included.



| Product Description | MRP (₹) |
|---------------------|---------|
| LFLPI-250-CDL/60-M  | 32000   |
| LFLPI-400-CDL/60-M  | 48000   |
| LFLPI-500-CDL/60-M  | 60000   |

# ***LANDSCAPE LIGHTING***

## LANDSCAPE LIGHTING

**FERN**

Decorative indirect post top for garden & landscape lighting with IP 65 protection. Resistant to impact and corrosion. Anti Glare and uniform distribution.



| Product Description | MRP (₹) |
|---------------------|---------|
| LPTOI-45-CDL        | 22000   |
| LPTOI-45-T          | 22000   |

**MAPLE**

Decorative Post top for 360° indirect light with IP 65 protection. Resistant to impact and corrosion. Glare-free and better uniformity.



| Product Description | MRP (₹) |
|---------------------|---------|
| LPTO-40-CDL         | 13000   |
| LPTO-40-CDL-M       | 12000   |
| LPTO-60-CDL         | 17500   |
| LPTO-60-CDL-M       | 16500   |

**NEBULA**

IP65 Rated LED Post Top with, moonlight effect and efficient light distribution. Also available with integrated decorative pole on request.



| Product Description | MRP (₹) |
|---------------------|---------|
| LPTM-40-CDL         | 10000   |

**HERITAGE**

IP65 Rated LED Post Top ideal to lit up parks, garden ways and heritage sites.



| Product Description | MRP (₹) |
|---------------------|---------|
| LPTH-20-CDL         | 7500    |
| LPTH-20-WW          | 7500    |

## LANDSCAPE LIGHTING

**TERRAIN**

TERRAIN Post Top lantern is a weather proof indirect lighting solution having improved horizontal uniformity, with reduced glare and improved lighting control.



New

**Product Description**

LPTC-40-CDL

**MRP (₹)**

11000

**EMPIRE**

IP66 Rated Decorative Street Light for garden ways and other City Beautification Applications.

**Product Description**

LPTE-60-CDL

LPTE-120-CDL

**MRP (₹)**

24500

28500

**TWISTER**

IP65 Rated LED Bollard with robust design and efficient light distribution.

**Product Description**

LBLTW-10-CDL

LBLTW-10-WW

**MRP (₹)**

5200

5400

**SYRUS**

IP65 Rated LED Bollard with robust design and efficient light distribution.

**Product Description**

LBLSR-10-CDL

LBLSR-10-WW

**MRP (₹)**

4600

4800



## LANDSCAPE LIGHTING

**LIARA**

IP65 rated Inverted Pyramid Tripod type LED Bollard with soft 360 deg light distribution.

**Product Description**

LBSN-10-CDL

**MRP (₹)**

8000

**MAYA I**

Pressure die cast powder coated housing with PC diffuser. Efficient high output LED with IP 66 protection.

**Product Description**

LBLA1-10-CDL

**MRP (₹)**

4000

**MAYA II**

Pressure die cast powder coated housing with PC diffuser. Efficient high output LED with IP 66 protection.

**Product Description**

LBLA2-10-CDL

**MRP (₹)**

4200

**MAYA III**

Pressure die cast powder coated housing with PC diffuser. Efficient high output LED with IP 66 protection.

**Product Description**

LBLA3-10-CDL

**MRP (₹)**

4500

**BEACON**

IP65 Rated LED Step Light for Outdoor Applications.

**Product Description**

LSL-6-CDL

**MRP (₹)**

2400

LSL-6-VVV

2600

## LANDSCAPE LIGHTING

## TWILIGHT

LED outdoor UP-DOWN light with IP65 protection  
Available with 30000K & 57000K



| Product Description | MRP (₹) |
|---------------------|---------|
| LUPDN-10-CDL        | 3600    |
| LUPDN-10-WW         | 3800    |



**Crompton**  
SolarLED

## ***SOLAR LED LIGHTING***

**Crompton**  
SolarLED



# All-In-One **SOLAR** STREET LIGHTS



**EASY INSTALLATION**



**EASY MAINTENANCE**



**LONG LIFE**

SOLAR  
STREET LIGHT



**HELIUS I**

Smart integrated Solar All In One Street Light with Highest Ever system efficacy of 170Lum/W, MPPT Charge Controller, LiFePO4 battery, Mono Crystalline Solar Panel, PIR motion sensor, easy installation

**MOQ : 20 Nos**



| Product Description | System Wattage | Solar Panel | Battery    | MRP (₹) |
|---------------------|----------------|-------------|------------|---------|
| CSADHMP17CDL        | 17             | 40          | 12.8V 20Ah | 69000   |
| CSADHMP20CDL        | 20             | 40          | 12.8V 20Ah | 70000   |
| CSADHMP25CDL        | 25             | 45          | 12.8V 21Ah | 76000   |
| CSADHMP30CDL        | 30             | 60          | 12.8V 24Ah | 84500   |
| CSADHMP40CDL        | 40             | 60          | 12.8V 27Ah | 107000  |
| CSADHMP50CDL        | 50             | 80          | 12.8V 36Ah | 113000  |
| CSADHMP60CDL        | 60             | 100         | 12.8V 42Ah | 132000  |

**HELIUS II**

Smart Integrated Solar All In One with > 140Lum/W, MPPT Charge Controller, Tilttable LED panel, Adjustable AIO mounting angle, Mono Crystalline Solar Panel, PIR motion Sensor, easy to install

**MOQ : 20 Nos**



| Product Description | System Wattage | Solar Panel | Battery    | MRP (₹) |
|---------------------|----------------|-------------|------------|---------|
| CSADEMPS09CDL       | 9              | 40          | 12.8V 10Ah | 42000   |
| CSADEMPS12CDL       | 12             | 40          | 12.8V 12Ah | 46000   |
| CSADEMPS15CDL       | 15             | 40          | 12.8V 15Ah | 49000   |
| CSADEMPS18CDL       | 18             | 50          | 12.8V 18Ah | 54000   |
| CSADEMPS20CDL       | 20             | 60          | 12.8V 20Ah | 68000   |
| CSADEMPS25CDL       | 25             | 75          | 12.8V 24Ah | 74000   |
| CSADEMPS30CDL       | 30             | 75          | 12.8V 30Ah | 82000   |
| CSADEMPS40CDL       | 40             | 100         | 12.8V 36Ah | 103000  |
| CSADEMPS50CDL       | 50             | 120         | 12.8V 48Ah | 108000  |
| CSADEMPS60CDL       | 60             | 150         | 12.8V 54Ah | 126000  |

**Terms & Conditions**

1. Excludes installation charges
2. Taxes, as applicable
3. Warranty as per company's T&C
4. Solar system performance varies from location to location.  
Please contact our nearest branch office for appropriate technical parameters w.r.t. Battery & panel sizing

**HELIUS III**

Smart integrated Solar All In One Street Light with 120Lum/W, MPPT Charge Controller, LiFePO4 battery, Mono Crystalline Solar Panel, PIR motion sensor, easy installation

**MOQ : 20 Nos**



| Product Description | System Wattage | Solar Panel | Battery    | MRP (₹) |
|---------------------|----------------|-------------|------------|---------|
| CSADSMPO9CDL        | 9              | 30          | 12.8V 9Ah  | 42000   |
| CSADSMPI2CDL        | 12             | 30          | 12.8V 9Ah  | 43000   |
| CSADSMPI5CDL        | 15             | 30          | 12.8V 10Ah | 45000   |
| CSADSMPI20CDL       | 20             | 40          | 12.8V 20Ah | 58000   |
| CSADSMPI25CDL       | 25             | 45          | 12.8V 21Ah | 60000   |
| CSADSMPI30CDL       | 30             | 60          | 12.8V 24Ah | 66000   |
| CSADSMPI40CDL       | 40             | 60          | 12.8V 27Ah | 89000   |
| CSADSMPI50CDL       | 50             | 80          | 12.8V 36Ah | 105000  |
| CSADSMPI60CDL       | 60             | 100         | 12.8V 42Ah | 115000  |

**HELIUS IV**

Smart integrated Solar All In One Street Light with >100Lum/W, PWM Charge Controller, Li Ion battery, Mono Crystalline Solar Panel, PIR motion sensor, easy installation

**MOQ : 20 Nos**




| Product Description | System Wattage | Solar Panel | Battery      | MRP (₹) |
|---------------------|----------------|-------------|--------------|---------|
| CSADSPI09CDL        | 9              | 40          | 11.1V 11Ah   | 36000   |
| CSADSPI12CDL        | 12             | 40          | 11.1V 13Ah   | 38000   |
| CSADSPI15CDL        | 15             | 40          | 11.1V 15Ah   | 40000   |
| CSADSPI18CDL        | 18             | 50          | 11.1V 19.8Ah | 48000   |
| CSADSPI20CDL        | 20             | 60          | 11.1V 23.4Ah | 54000   |
| CSADSPI25CDL        | 25             | 75          | 11.1V 26Ah   | 58000   |
| CSADSPI30CDL        | 30             | 75          | 11.1V 32Ah   | 64000   |
| CSADSPI40CDL        | 40             | 100         | 11.1V 41.6Ah | 84000   |
| CSADSPI50CDL        | 50             | 120         | 11.1V 52Ah   | 89000   |

5. Poles (Tubular / octagonal) can be provided on request
6. System Health monitor / control system via Bluetooth / Wi-fi can be provided on request
7. Higher Wattage systems can also be provided on request
8. Pictures shown are for representation purpose only

# ***HIGH MAST & POLES***

## BASIC WIND SPEED IN m/s


(Based on past 50 years record available)

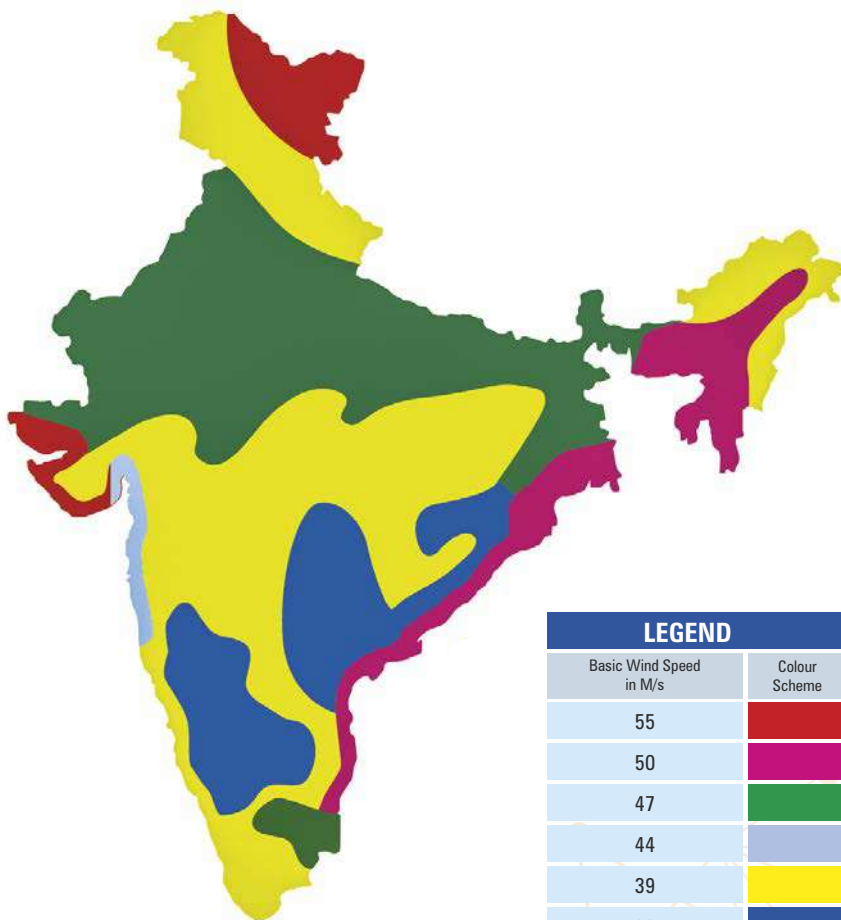

### BASIC WIND SPEED

India is a vast country with diverse climatic conditions. Wind speed at various locations change as per conditions. Based on past 50 years record of basic wind speed. We provide high mast structure that sustains the basic wind speed of the location and head loads.

## TYPICAL BASE COMPARTMENT OF A HIGH MAST

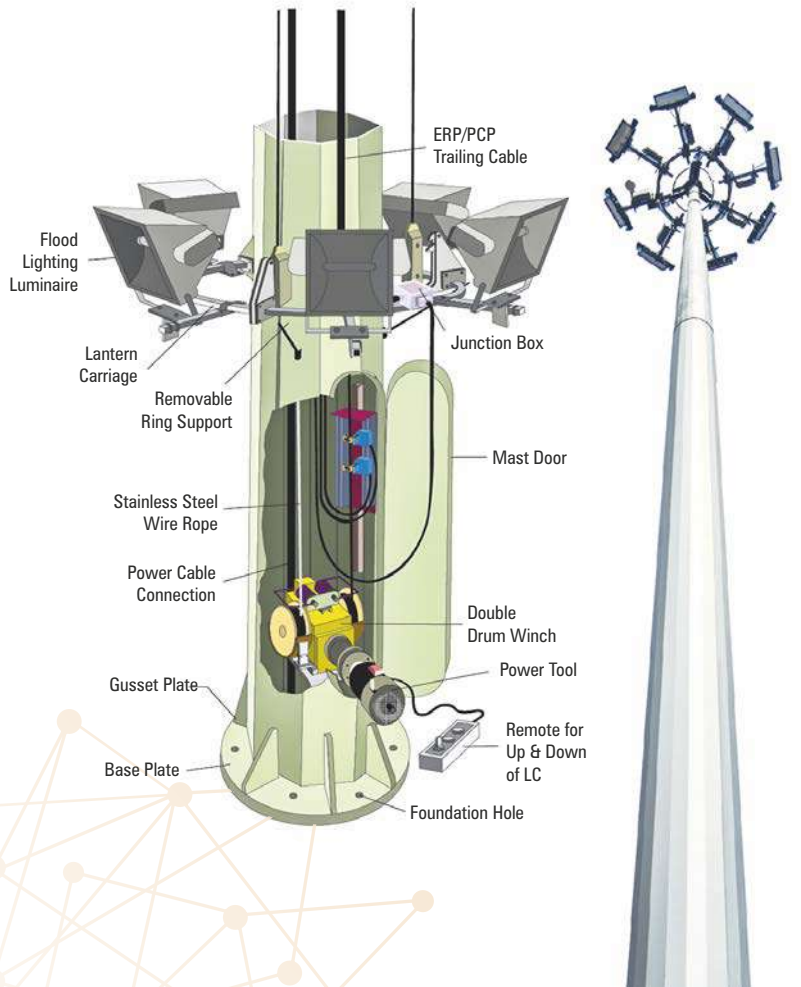



## HIGH MAST

High Mast lighting as a concept in area lighting is being preferred over conventional lighting especially where large areas are to be illuminated without the need for numerous lighting columns. High Mast lighting is ideal for industrial and commercial areas, docks, airports, stations, car parks and hazardous areas.

| Height of Mast                   | 12.5 Mtr                   | 16 Mtr                                | 20 Mtr                                | 25 Mtr                                     | 30 Mtr                                     |
|----------------------------------|----------------------------|---------------------------------------|---------------------------------------|--------------------------------------------|--------------------------------------------|
| Cat ref                          | HM-12.5B-LM-ACC            | HM-16A-LM-ACC                         | HM-20A-LM-ACC                         | HM-25A-LM-ACC                              | HM-30B-LM-ACC                              |
| Material of Construction         | BSEN 10025                 | BSEN 10025                            | BSEN 10025                            | BSEN 10025                                 | BSEN 10025                                 |
| Sectional Thickness              | Top : 3 mm<br>Bottom: 3 mm | Top : 3 mm<br>Bottom: 4 mm            | Top : 3 mm<br>Bottom: 4 mm            | Top : 3 mm<br>Middle: 4 mm<br>Bottom: 5 mm | Top : 4 mm<br>Middle: 4 mm<br>Bottom: 5 mm |
| Bottom (A/F)                     | 360 mm                     | 360 mm                                | 410 mm                                | 460 mm                                     | 600 mm                                     |
| Top (A/F)                        | 150 mm                     | 150 mm                                | 150 mm                                | 150 mm                                     | 150 mm                                     |
| <b>Lantern Carriage</b>          |                            |                                       |                                       |                                            |                                            |
| Luminaries                       | 6 Nos                      | 9 Nos                                 | 12 Nos                                | 12 Nos                                     | 12 Nos                                     |
| Orientation                      | Symmetrical                | Symmetrical                           | Symmetrical                           | Symmetrical                                | Symmetrical                                |
| Number of arms                   | 6 Arms                     | 9 Arms                                | 6 Arms                                | 6 Arms                                     | 6 Arms                                     |
| <b>Dynamic Loading</b>           |                            |                                       |                                       |                                            |                                            |
| Wind speed                       | 180 kmph                   | 180 kmph                              | 180 kmph                              | 180 kmph                                   | 180 kmph                                   |
| Type                             | Double Drum                | Double Drum                           | Double Drum                           | Double Drum                                | Double Drum                                |
| <b>Stainless Steel Wire Rope</b> |                            |                                       |                                       |                                            |                                            |
| Grade                            | AISI 316                   | AISI 316                              | AISI 316                              | AISI 316                                   | AISI 316                                   |
| Construction                     | 7 /19                      | 7 /19                                 | 7 /19                                 | 7 /19                                      | 7 /19                                      |
| Number of ropes                  | 2 Wire Rope System         | 2 For Winch<br>3 for Lantern Carriage | 2 For Winch<br>3 for Lantern Carriage | 2 For Winch<br>3 for Lantern Carriage      | 2 For Winch<br>3 for Lantern Carriage      |
| Diameter                         | 6 mm                       | 6 mm                                  | 6 mm                                  | 6 mm                                       | 6 mm                                       |
| Breaking Load capacity           | 2350 kg                    | 2350 kg                               | 2350 kg                               | 2350 kg                                    | 2350 kg                                    |
| <b>Trailing Cable</b>            |                            |                                       |                                       |                                            |                                            |
| Conductor                        | 5 Core 2.5 Sq mm           | 5 Core 2.5 Sq mm                      | 5 Core 2.5 Sq mm                      | 5 Core 2.5 Sq mm                           | 5 Core 2.5 Sq mm                           |
| Insulation                       | Flexible                   | Flexible                              | Flexible                              | Flexible                                   | Flexible                                   |
| No. of circuits per mast         | One                        | One                                   | One                                   | One                                        | One                                        |
| <b>Power Tool</b>                |                            |                                       |                                       |                                            |                                            |
| Input Supply                     | 415 V                      | 415 V                                 | 415 V                                 | 415 V                                      | 415 V                                      |
| Method of operation              | Integral Motor             | Integral Motor                        | Integral Motor                        | Integral Motor                             | Integral Motor                             |

- Note:** 1. For wind speed other than 180 kmph; the High mast can be designed on request  
 2. The above mast are considered for Symmetrical orientation however Asymmetrical can also be provided on request.

## OCTAGONAL POLES

## OCTAGONAL POLES

Octagonal Poles are available from 3 mtrs to 12 mtrs height. Street light poles can have single arm as well as double arm brackets. Poles are hot dip galvanized.

| Height Of Poles            | 5 Mtr              | 7 Mtr              | 9 Mtr              | 10 Mtr             | 11 Mtr             | 12 Mtr             |
|----------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Cat ref                    | HM-1105P           | HM-1107P           | HM-1109P           | HM-1110P           | HM-1111P           | HM-1112P           |
| Material of                | BSEN 10025         | BSEN 10025         | BSEN 10025         | BSEN 10025         | BSEN 10025         | BSEN 10025         |
| Metal Protection Treatment | Hot Dip Galvanized | Hot Dip Galvanized | Hot Dip Galvanized | Hot Dip Galvanized | Hot Dip Galvanized | Hot Dip Galvanized |
| Thickness of Galvanization | 65 microns         | 65 microns         | 65 microns         | 65 microns         | 65 microns         | 65 microns         |
| Thickness of Sheet         | 3 mm               | 3 mm               | 3 mm               | 3 mm               | 3 mm               | 3 mm               |
| Thickness of Base Plate    | 12 mm              | 16 mm              | 16 mm              | 16 mm              | 20 mm              | 20 mm              |
| Bottom Dia                 | 130 mm             | 135 mm             | 155 mm             | 175 mm             | 210 mm             | 230 mm             |
| Top Dia                    | 70 mm              | 70 mm              | 70 mm              | 70 mm              | 90 mm              | 90 mm              |
| No of FDB Bolts            | 4                  | 4                  | 4                  | 4                  | 4                  | 4                  |

**Note:** 3mtr, 4mtr and 6 mtr Octagonal poles are also available on request





**Advantages of GRP poles:** These are high corrosion resistance poles and are safe in accidents. These poles are light in weight and fast and easy for installation. GRP poles are electrically non conductive.

**Manufacture / Construction:** The GRP Pole will be made from a minimum of 62 to 70% electrical glass roving Encapsulated in a maximum of 30% high temperature cured specially formulated corrosion resistant unfilled epoxy resin matrix. The dielectric rating of the material will be at least 5k V / mm. The GRP Pole will be constructed from continuous electrical glass rovings. The GRP Pole shall be made via the filament winding process on a 4-axis CNC winding machine using PLC to control machine movements. Winding shall be done in such a way that GRP Pole has desired stiffness and strength. Substitution by alternate manufacturing process will not be permitted.

**Thickness:** GRP Pole shall have a minimum thickness of 6 mm up to 7mtr. besides what may be required to achieve the loading and safety specified in Clause 3.0

**Flame Resistance:** GRP Pole will not contain chlorine (or any halogen) or other toxic materials in excess of trace Levels and always less than safe OSHA (or equivalent) limits. When subjected to 2 consecutive 60 seconds flame Application, it must self extinguish after the last flame application

**Surface Finish:** GRP Pole will be provided with architecturally pleasing finish. It shall be provided with at least 1 layer of 2-part primer and at least 1 layer of premium grade 2-part polyurethane finish. GRP Pole will be free from defects, commercially practicable in color, shall be completely opaque, shall have a minimum density of 1.8 and other physical characteristics / properties mentioned below. In general, the GRP Pole shall be free from nicks and burrs

**Color:** GRP Pole will be supplied according to above color specification with 50-micron thickness done by the application of air-spray only

**Applicable Standards:** FES: 057L-1999, ANSI C136



Landscape lighting forms an integral part of modern downtown and often provides "Signature" appearances. Designing an effective Landscape demands selecting right products that blend with the architecture and tune themselves with the surroundings. Modern urbanscape areas comprising of taller building, commercial spaces, recreational areas, areas of heritage importance and waterfronts use more and more landscape lighting to create an alluring environment. Crompton products combines with architecture to give any area a signature daytime appearance while providing effective night-time brilliance.

*\* Poles available on request*



## Lighting Control - Indoor Segment

Improved energy efficiency and flexibility is driving the need for greater use of lighting control

### Types of Control System


- Occupancy-based control
- Daylight harvesting and dimming
- Intelligent lighting control System
- Wireless Control
- Power over Ethernet (PoE)



\* Please contact nearest branch for assistance in designing the project.

## Lighting Controls - Outdoor Segment

- 1 Group Dimming Solutions
- 2 CCMS Solutions
- 3 Individual Light Control

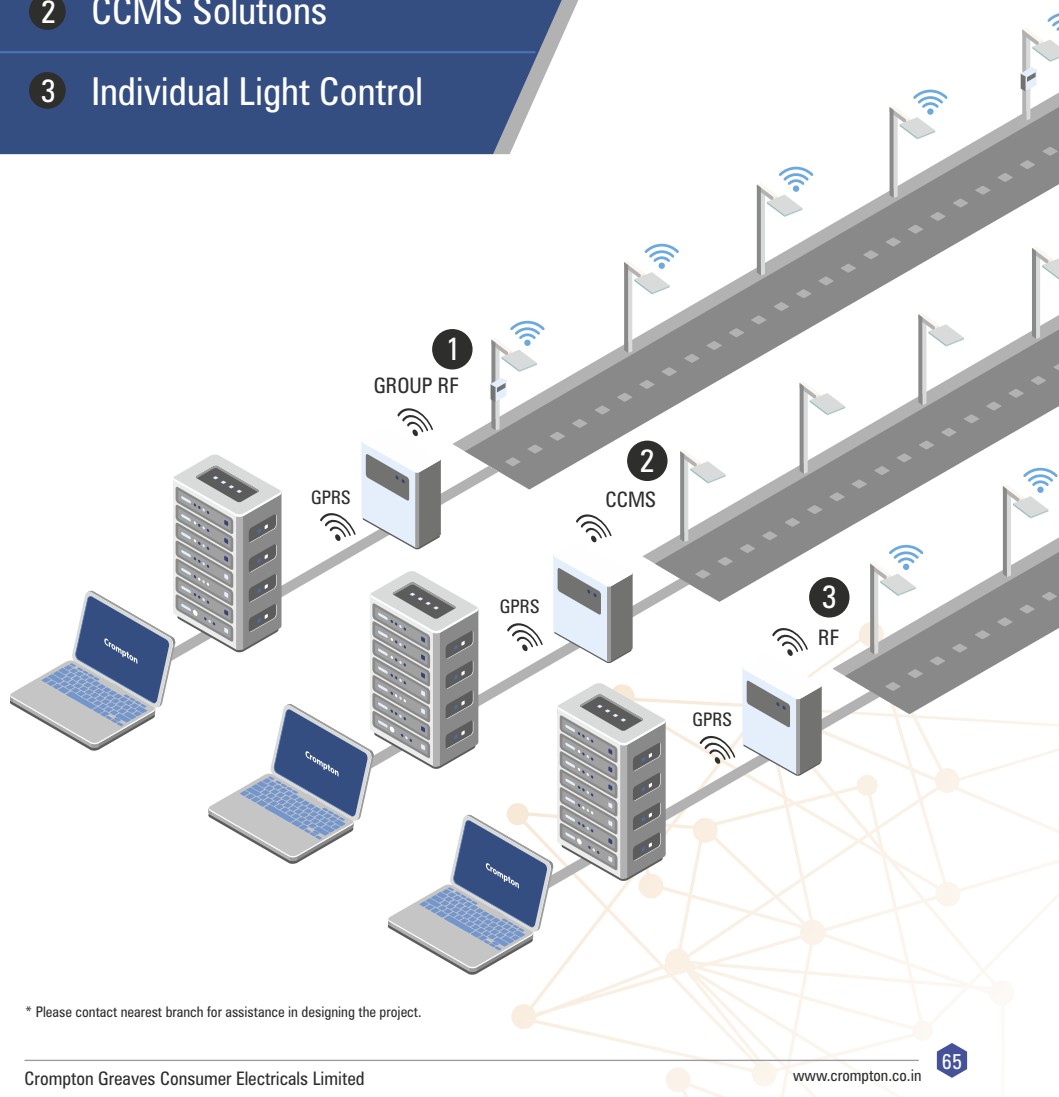

\* Please contact nearest branch for assistance in designing the project.

## LED OUTDOOR ACCESSORIES

## LED OUTDOOR DRIVERS



| Product Description | Wattage | MRP (₹) |
|---------------------|---------|---------|
| S0DVES-24-700-20W   | 20W     | 920     |
| S0DRVES-36-600-25W  | 25W     | 1000    |
| S0DQL1-54-700-40W   | 40W     | 1900    |
| S0DQL-65-700-45W    | 45W     | 2000    |

## LED OUTDOOR DRIVERS




| Product Description | Wattage | MRP (₹) |
|---------------------|---------|---------|
| X075C070V107FNY1B0  | 75W     | 2400    |
| X100C070V143FNY1B0  | 100W    | 3400    |
| X150C070V210FNI1B0  | 150W    | 3600    |

## SURGE PROTECTION DEVICES



| Product Description                                                                                | Voltage | MRP (₹) |
|----------------------------------------------------------------------------------------------------|---------|---------|
| SRPS-5K-440                                                                                        | 5KV     | 200     |
| Surge protection devices compatible with industrial & outdoor LED fixtures upto rated power of 75W |         |         |

## SURGE PROTECTION DEVICES

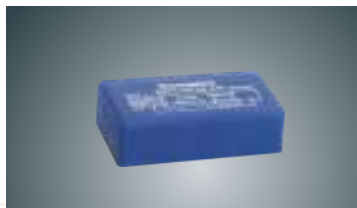

| Product Description                                                                                               | Voltage | MRP (₹) |
|-------------------------------------------------------------------------------------------------------------------|---------|---------|
| SRPS-HP-5K-440                                                                                                    | 5KV     | 250     |
| Surge protection devices compatible with industrial & outdoor LED fixtures with rated power above 75W & upto 150W |         |         |

## SURGE PROTECTION DEVICES



| Product Description                                                         | Voltage | MRP (₹) |
|-----------------------------------------------------------------------------|---------|---------|
| SRPSQ-10KV/5KA-440                                                          | 10KV    | 600     |
| Surge protection devices compatible with industrial & outdoor LED fixtures. |         |         |

|                        |                            |                        |                       |
|------------------------|----------------------------|------------------------|-----------------------|
| <b>INDOOR LIGHTING</b> | LCSR-06-CDL                | LHB11-110-CDL/60       | LSTP-60-CDL           |
| LCL-07-CDL             | LCSR-12-CDL                | LHB11-140-CDL/60       | LSTP-72-CDL           |
| LCL-14-CDL             | LSDRN-24W-CDL/WW           | LHB-90-CDL/60          | LSTS-30-CDL           |
| LCTRDI-36-CDL          | LSDSN-24W-CDL/WW           | LHB-100-CDL/60         | LSTS-40-CDL           |
| LCTRQ1-36-CDL          | LCDE-06-CDL                | LHB-120-CDL/60         | LSTS-45-CDL-1         |
| LCTRQ2-36-CDL          | LCDE-09-CDL                | LHB-135-CDL/60         | LSTS-12-CDL           |
| LCTLRN-18-FO-CDL       | LCDE-12-CDL                | LHBN-150-CDL/60        | LSTS-15-CDL           |
| LCTLRN-24-FO-CDL       | LCDE-15-CDL                | LHB-200-CDL/60         | LSTS-18-CDL           |
| LCTLRN-30-FO-CDL       | LCDE-18-CDL                | LHB-250-CDL/60         | LSTS-25-CDL           |
| LCTLRN-36-FO-CDL       | LSDE-06-CDL                | LHB-300-CDL/60         | <b>FLOOD LIGHTING</b> |
| LCTLRN-50-FO-CDL       | LSDE-09-CDL                | LHB-350-CDL/60         | LFLN11-30-CDL         |
| LCTLSN-36-CDL          | LSDE-12-CDL                | LHBL-60-CDL            | LFLN11-35-CDL/60      |
| LCTLRN-36-CDL          | LSDE-15-CDL                | LHBL-90-CDL            | LFLE-50-CDL           |
| LCTLRN-18-CDL          | LSDE-18-CDL                | LHBL-120-CDL           | LFL-60-CDL/60         |
| LCTLSN-18-CDL          | LCTL-18-CDL                | LCNR-80-CDL            | LFL-80-CDL/60         |
| LCTLRN-24-CDL          | LCTL-9-CDL                 | LCNP-80-CDL            | LFLN-90-CDL/60        |
| LCTLSN-24-CDL          | LCCLB08-CDL                | LCNP-80-CDL(600)       | LFLN-100-CDL/60       |
| LCTLRN-40-CDL(1X4)     | LCCLB16-CDL                | LWV11-36-CDL/RFR       | LFLN-120-CDL/60       |
| LCTLSN-40-CDL(1X4)     | LCCLB24-CDL                | IGP131LT8-16           | LFLN-135-CDL/60       |
| LCSRR-4-CDL/TL/WW      | LPLLA-18-CDL               | IGP132LT8-16           | LFLN-150-CDL/60       |
| LCSRR-6-CDL/TL/WW      | LST205050CDL/BL/WW         | LPFC-18-CDL            | LSFO-170-CDL/60       |
| LCSRR-4-CDL/TL/WW      | LST205050CDL/RGB           | LPFC-36-CDL            | LSFO-200-CDL/60       |
| LCSRR-6-CDL/TL/WW      | LST655050CDL/BL/WW         | LBH-10-CDL             | LSFO-250-CDL/60       |
| LCDN-12-CDL/TL/WW      | LST655050CDL/RGB           | IBFN100-15-CDL         | LSFO-300-CDL/60       |
| LCDN-15-CDL/TL/WW      | <b>INDUSTRIAL LIGHTING</b> | <b>STREET LIGHTING</b> | LSFO-350-CDL/60       |
| LCDN-18-CDL/TL/WW      | LWV12-35-CDL               | LSTN-170-CDL-A         | LFLN11-70-CDL/60      |
| LSDN-12-CDL/TL/WW      | LWV12-35-CDL-CPC           | LSTN-200-CDL-A         | LFLN11-110-CDL/60     |
| LSDN-15-CDL/TL/WW      | LWV12-35-CDL-DPC           | LSTN-220-CDL-A         | LFLN11-140-CDL/60     |
| LSDN-18-CDL/TL/WW      | LWV12-70-CDL               | LSTN-250-CDL-A         | LFLPI-200-CDL/60      |
| LCDN-30-CDL/TL/WW      | LWVLT-40-CDL               | LSTP-90-CDL            | LFLPI-250-CDL / 60    |
| LCDN-40-CDL/TL/WW      | LHB11-35-CDL/60            | LSTP-45-CDL            |                       |
| LCDN-50-CDL/TL/WW      | LHB11-70-CDL/60            |                        |                       |

**Applicable for LED Luminaires / LED Lamps**

- MRP indicates Maximum Retail Price. Product can't be sold above MRP. Taxes and local levies as applicable is inclusive.
- Prices are in Indian Rupees.
- Prices of all LED luminaires in this price list are for standard luminaire.
- Prices are inclusive of GST as per prevailing rate at the time of supply. Any statutory variation will be to purchaser's account.
- Goods are dispatched by us on Purchaser's risk. All claims for loss, damage or shortage will be filed by the Purchasers directly with the carriers.
- Orders should be placed in multiples of case lot.
- Items other than those included in this price list are withdrawn from the range.
- This pricelist supersedes our pricelist dated 1st January 2018.
- All fixtures will be supplied as per our normal specifications. For additional features, please contact the nearest local office for details.
- Continuous design improvement is a routine practice at Crompton. Data provided may change without any prior information. Customers are advised to reconfirm the data or product dimensions before purchase at our local offices.
- Prices are subject to change without prior notice.
- All orders shall be placed in writing.
- Company reserves right to issue amendments, which may arise due to any errors in the price list.

CARE HAS BEEN TAKEN TO ENSURE THAT THE INFORMATION CONTAINED WITHIN IS CORRECT. HOWEVER, OWING TO CONTINUOUS INNOVATIONS AND IMPROVEMENTS THE ACTUAL PRODUCT WHEN SUPPLIED, MAY DIFFER FROM THE DETAILS GIVEN HEREIN.

PHOTOGRAPHS SHOWN HEREIN ARE INDICATIVE. PLEASE CHECK WITH NEAREST SALES OFFICE FOR THE ACTUAL PRODUCT.

CROMPTON RESERVES THE RIGHTS TO MAKE CHANGES IN THE DATA / DETAILS WITHOUT PRIOR NOTICE.



## SALES OFFICES

## Branch

## Phone No.

## East Region

|                                                                                                                                                |              |
|------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| <b>Kolkata</b> : 50, Chowringhee Road, 1st Floor Rear Block, Kolkata - 700071, West Bengal                                                     | 033-4051900  |
| <b>Guwahati</b> : 3rd Floor, shubham Velocity, Hanuram Boro Path Walford, GS Road, Guwahati, Assam- 781005                                     | 9678085875   |
| <b>Bhubaneswar</b> : Crompton Greaves Consumer Electricals Limited, Janpath Tower, 3rd Floor, Ashok Nagar Unit II, Bhubaneswar- 751009, Odisha | 0674-2531429 |
| <b>Ranchi</b> : Ess Ess Agencies 3 West End Park, Kaju Bagan, Near Dav Junior School, Hehal Ratu Road Ranchi - 834005, Jharkhad                | 9771411293   |
| <b>Patna</b> : 3rd Floor, Shri Sadan, House No. 9, Opp. Ruban Hospital, Near Patliputra Golamber, Patliputra Colony, Patna 800013, Bihar       | 8407074981   |

## West Region

|                                                                                                                                                                                  |                            |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| <b>Mumbai</b> : Crompton Greaves Consumer Electricals Ltd. Business Square, A-Wing, 302, 3rd floor, Chakala, Opp Apple Heritage, Andher-Kurla Road, Andheri East, Mumbai- 400093 | (022)61132700 / 9007059508 |
| <b>Ahmedabad</b> : Crompton Greaves Consumer Electricals Ltd. 4th Floor , 405 Gala Argos, BH Gujarat College , Ahmedabad 380007. Gujarat                                         | 9909909332                 |
| <b>Pune</b> : Crompton Greaves Consumer Electricals Ltd. Durwankur Apartment. Wrangler. Paranjape Road, Behind Vaishali Hotel, FC Road, Pune-411004. Maharashtra                 | 9167540712                 |
| <b>Indore</b> : Crompton Greaves Consumer Electricals LTD. 409, 4th Floor, Satguru Parinay, Infront of C21 Mall A . B. Road , Indore 452010 M.P.                                 | 9713244447                 |
| <b>Nagpur</b> : Crompton Greaves Consumer Electricals Ltd. 2nd Floor, Manik Bhawan, Plot No.7&8, Tatyia Tope Nagar, West High Court Road, Nagpur-440015. Maharashtra             | 7389604075                 |
| <b>Raipur</b> : Crompton Greaves Consumer Electricals LTD, A-311, Crystal Arcade, Lodhi Para Square, Shankar Nagar, Raipur - 492007.                                             | 7222933334                 |

## North Region

|                                                                                                                                       |              |
|---------------------------------------------------------------------------------------------------------------------------------------|--------------|
| <b>Delhi, Ghaziabad &amp; Haryana</b> : 9-10 Bahadur Shah Zafar Marg, 3rd Floor Express Building , Near ITO Crossing. New Delhi-11002 | 011-23460700 |
| <b>Jaipur</b> : Centre Point, 3rd Floor, Bhargu Nagar, Above Indusland Bank, DCM, Ajmer Road, Jaipur- 302006                          | 0141-4712700 |
| <b>Jalandhar</b> : Bxii-407, 2nd Floor, Near B.S.F Chowk, Ladowali Road, Jalandhar - 144001                                           | 0181-5044240 |
| <b>Lucknow</b> : Cyber Height, 2nd Floor, Office Space No.210, Vibhuti Khand, Gomti Nagar, Lucknow - 226010                           | 0522-4001511 |

## South Region

|                                                                                                                            |                                     |
|----------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| <b>Chennai</b> : Crompton House No.3, Dr. MGR Salai, Kodambakkam High Road, RBox No. 3316, Nungambakkam, Chennai - 600 034 | 044 - 40989533, 40989553, 4098514   |
| <b>Coimbatore</b> : SF219, Annamalai Industrial Park, Kalapatti, Coimbatore - 641 048                                      | 7094473102, 7094473103              |
| <b>Madurai</b> : 2/3, Mangakayarsi Womens College Road, Parvai, Madurai - 625 402 (Satellite Off)                          | 0452 - 2667771, 2667772, 9047072952 |
| <b>Bangalore</b> : J.P. Square, 3rd Floor, No.17, 3rd Cross, 5th Main, Chamrajpet, Bengaluru - 560 018                     | 080 - 41391908, 41391914, 41391912  |
| <b>Hyderabad</b> : No. 101 & 102, Babukhan Millennium Centre, Somajiguda, Hyderabad - 500 082                              | 040 - 40709975, 40709999            |
| <b>Cochin</b> : Cochin Branch, Door No. 3/5788, Zera Tower, Cheranallore, Cochin - 682034                                  | 0484 - 2433860/ 2433861             |

# Crompton

Dealer Stamp

**Crompton Greaves Consumer Electricals Limited**

Equinox Business Park, 1st Floor, Tower 3, LBS Marg,  
Kurla (W), Mumbai 400070. T: +91 22 6167 8499  
W: [www.crompton.co.in](http://www.crompton.co.in)